



BGP and the Internet

Multihoming

CISCO SYSTEMS



Multihoming Definition

- **More than one link external to the local network**
 - two or more links to the same ISP**
 - two or more links to different ISPs**
- **Usually **two** external facing routers**
 - one router gives link and provider redundancy only**

Multihoming

- The scenarios described here apply equally well to end sites being customers of ISPs and ISPs being customers of other ISPs
- Implementation detail may be different

end site ® ISP

ISP controls config

ISP1 ® ISP2

ISPs share config

AS Numbers

- **An Autonomous System Number is required by BGP**
- **Obtained from upstream ISP or Regional Registry**
- **Necessary when you have links to more than one ISP or exchange point**

Configuring Policy

- **Assumptions:**
prefix-lists are used throughout
easier/better/faster than access-lists
- **Three BASIC Principles**
prefix-lists to filter prefixes
filter-lists to filter ASNs
route-maps to apply policy

Originating Prefixes

- **Basic Assumptions**

MUST announce assigned address block to Internet

MAY also announce subprefixes - reachability is not guaranteed

RIR minimum allocation is /20 - several ISPs filter RIR blocks on this boundary - “Net Police”

Part of the “Net Police” prefix list

```
!! RIPE
ip prefix-list FILTER permit 62.0.0.0/8 ge 12 le 20
ip prefix-list FILTER permit 193.0.0.0/8 ge 12 le 20
ip prefix-list FILTER permit 194.0.0.0/7 ge 12 le 20
ip prefix-list FILTER permit 212.0.0.0/7 ge 12 le 20
!! APNIC
ip prefix-list FILTER permit 61.0.0.0/8 ge 12 le 20
ip prefix-list FILTER permit 202.0.0.0/7 ge 12 le 20
ip prefix-list FILTER permit 210.0.0.0/7 ge 12 le 20
!! ARIN
ip prefix-list FILTER permit 63.0.0.0/8 le 20
ip prefix-list FILTER permit 64.0.0.0/8 le 20
ip prefix-list FILTER permit 199.0.0.0/8 le 20
ip prefix-list FILTER permit 200.0.0.0/8 le 20
ip prefix-list FILTER permit 204.0.0.0/6 le 20
ip prefix-list FILTER permit 208.0.0.0/7 le 20
ip prefix-list FILTER permit 216.0.0.0/8 le 20
```


“Net Police” prefix list issues

- **meant to “punish” ISPs who won’t and don’t aggregate**
- **impacts legitimate multihoming**
- **impacts regions where domestic backbone is unavailable or costs \$\$\$ compared with international bandwidth**
- **hard to maintain - requires updating when RIRs start allocating from new address blocks**
- **don’t do it unless consequences understood**




Multihoming Options

Multihoming Scenarios


- **Stub network**
- **Multi-homed stub network**
- **Multi-homed network**
- **Configuration Options**

Stub Network

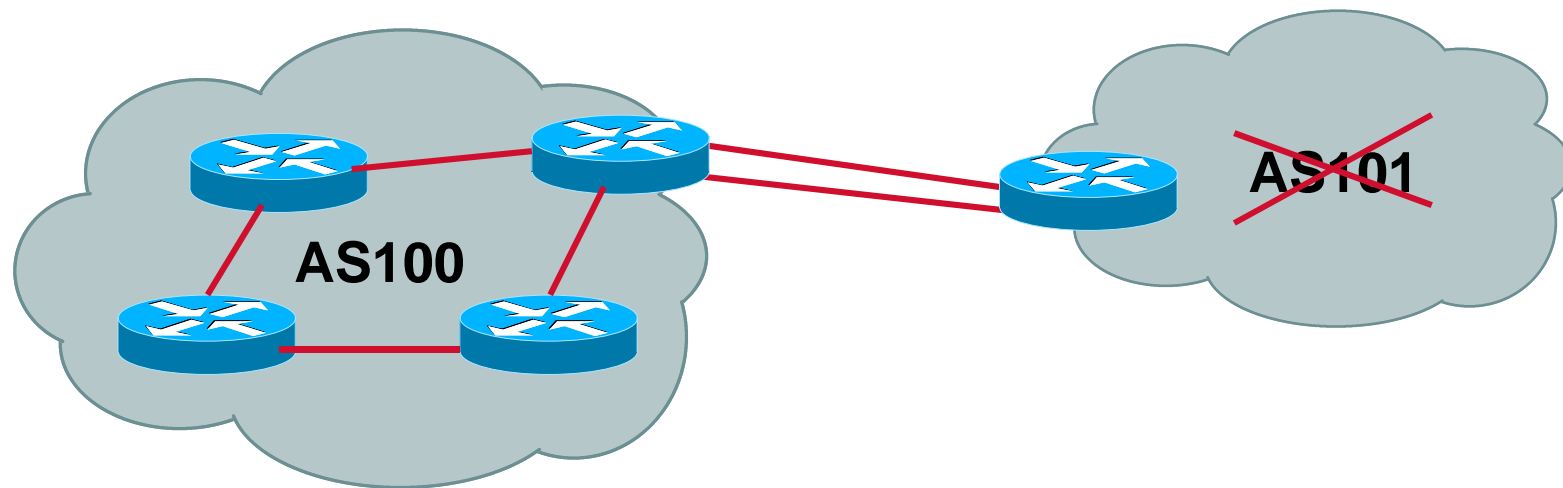


- **No need for BGP**
- **Point static default to upstream ISP**
- **Upstream ISP advertises stub network**
- **Policy confined within upstream ISP's policy**

Multi-homed Stub Network

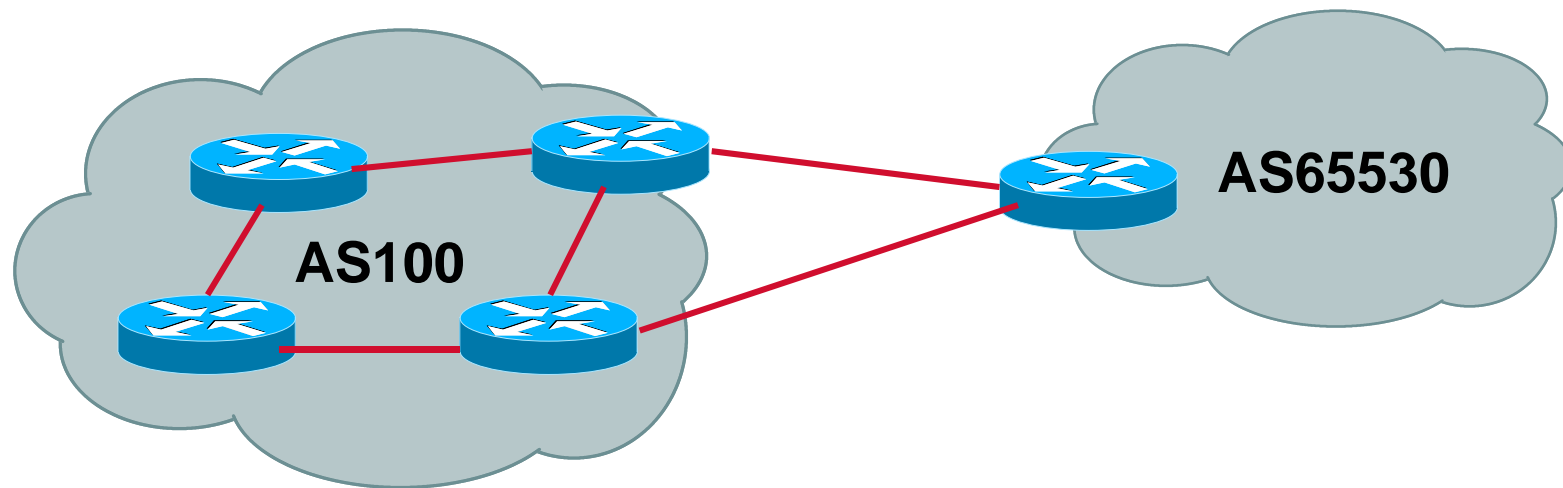

- **Use BGP (not IGP or static) to loadshare**
- **Use private AS (ASN > 64511)**
- **Upstream ISP advertises stub network**
- **Policy confined within upstream ISP's policy**


Multi-Homed Network

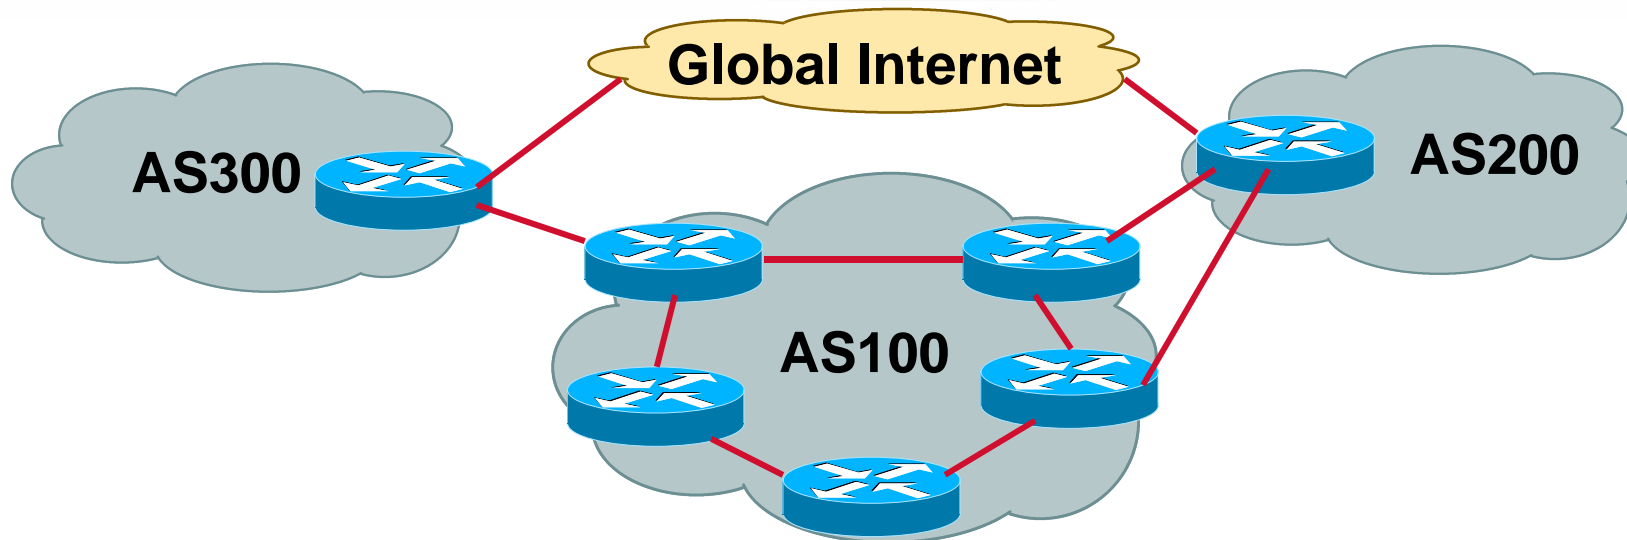

- **Many situations possible**
 - multiple sessions to same ISP
 - secondary for backup only
 - load-share between primary and secondary
 - selectively use different ISPs

Multiple Sessions to an ISP

- **Several options**
 - ebgp multihop**
 - bgp multipath**
 - cef loadsharing**
 - bgp attribute manipulation**

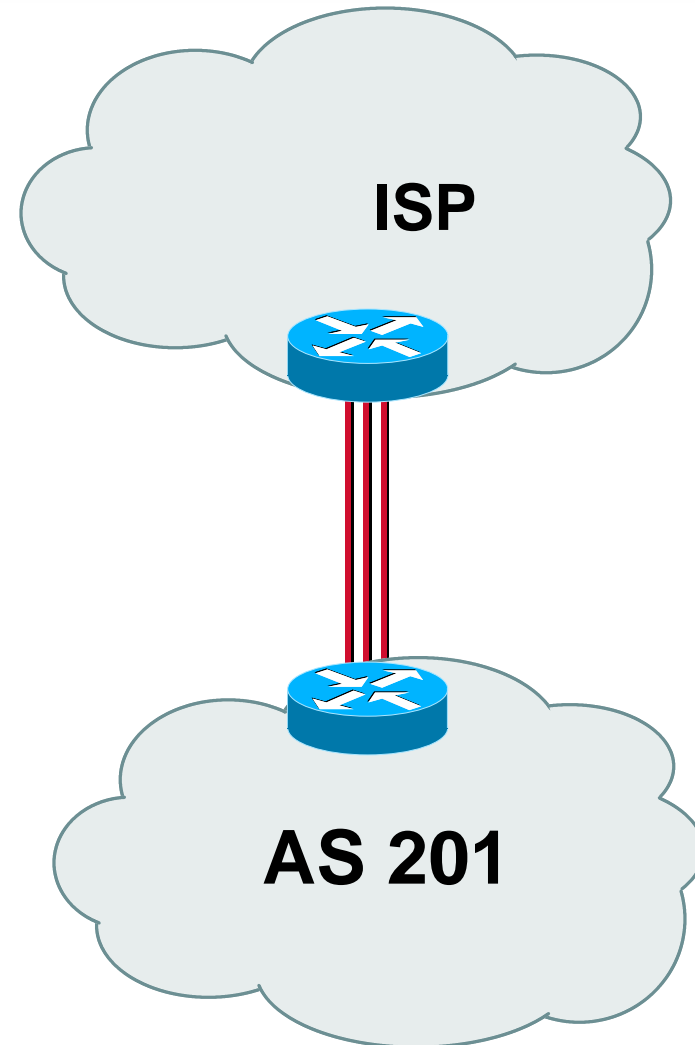


Multiple Sessions to an ISP

ebgp multihop

- eBGP to loopback addresses
- eBGP prefixes learned with loopback address as next hop

```
router bgp 201
  neighbor 1.1.1.1 remote-as 200
  neighbor 1.1.1.1 ebgp-multihop 5
ip route 1.1.1.1 255.255.255.255 serial 1/0
ip route 1.1.1.1 255.255.255.255 serial 1/1
ip route 1.1.1.1 255.255.255.255 serial 1/2
```

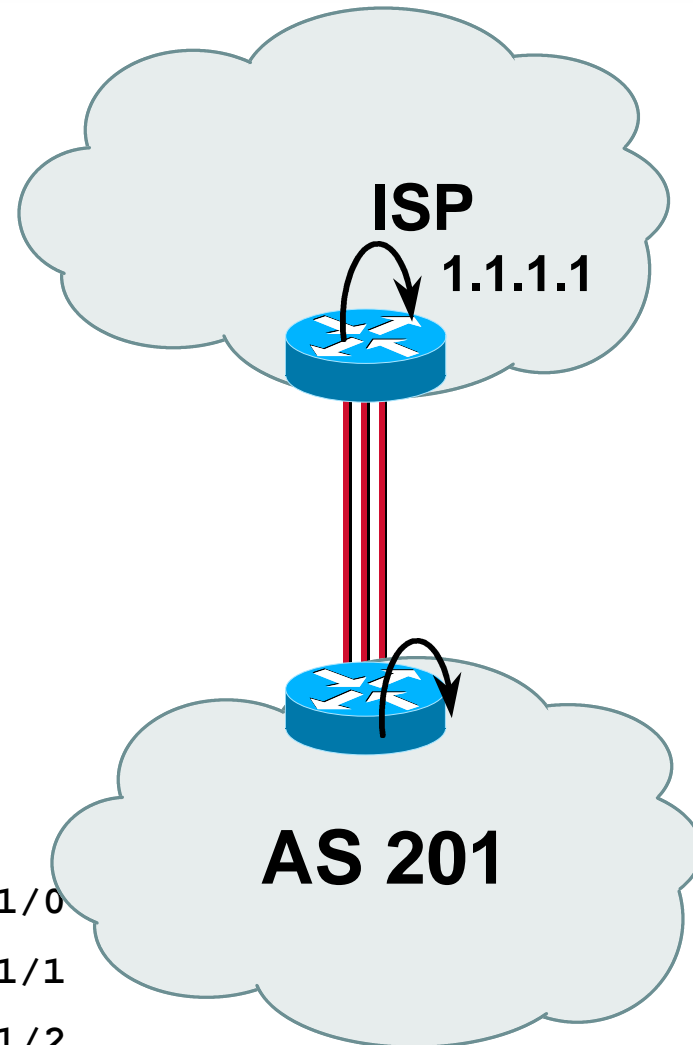

Multiple Sessions to an ISP

bgp multi path

- **Three BGP sessions required**
- **limit of 6 parallel paths**


```
router bgp 201
```

```
neighbor 1.1.2.1 remote-as 200
```

```
neighbor 1.1.2.5 remote-as 200
```

```
neighbor 1.1.2.9 remote-as 200
```

```
maximum-paths 3
```

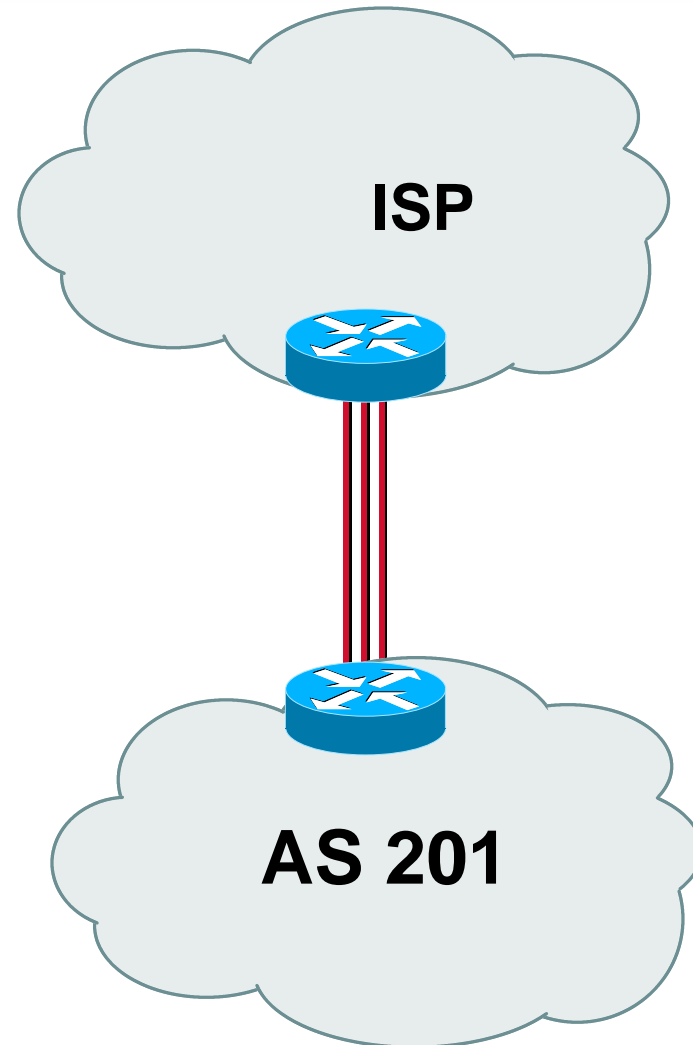

Multiple Sessions to an ISP


- Use eBGP multi-path to install multiple paths in IP table

```
router bgp 201
```

```
maximum-path <1-6>
```


- Load share over the alternate paths

per destination
loadsharing

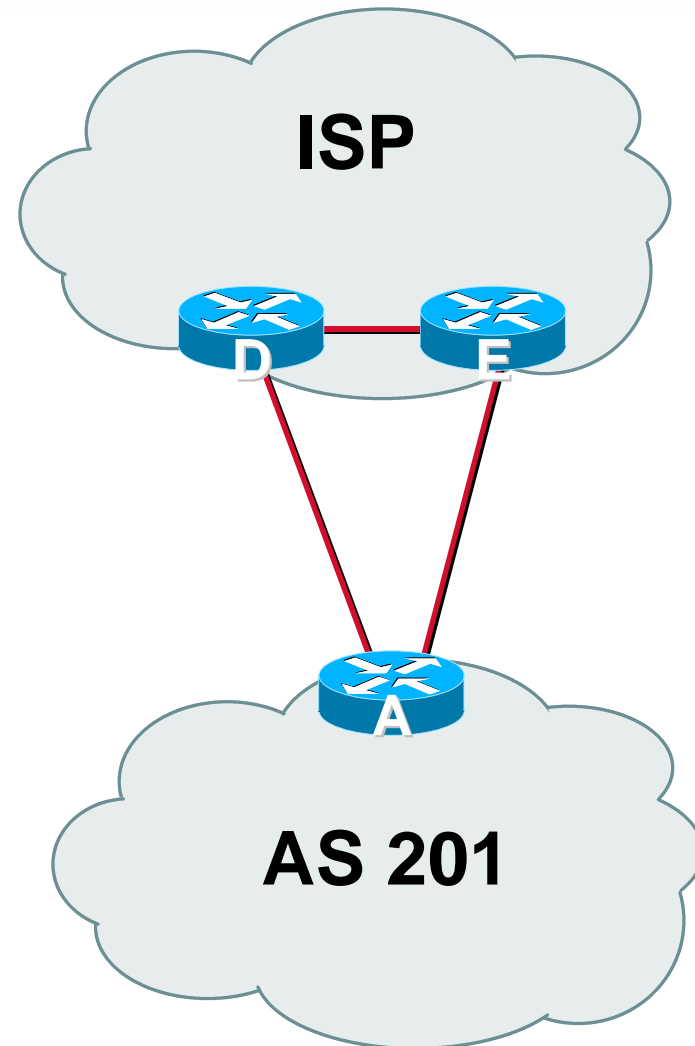

Multiple Sessions to an ISP

- **Simplest scheme is to use defaults**
- **Learn/advertise prefixes for better control**

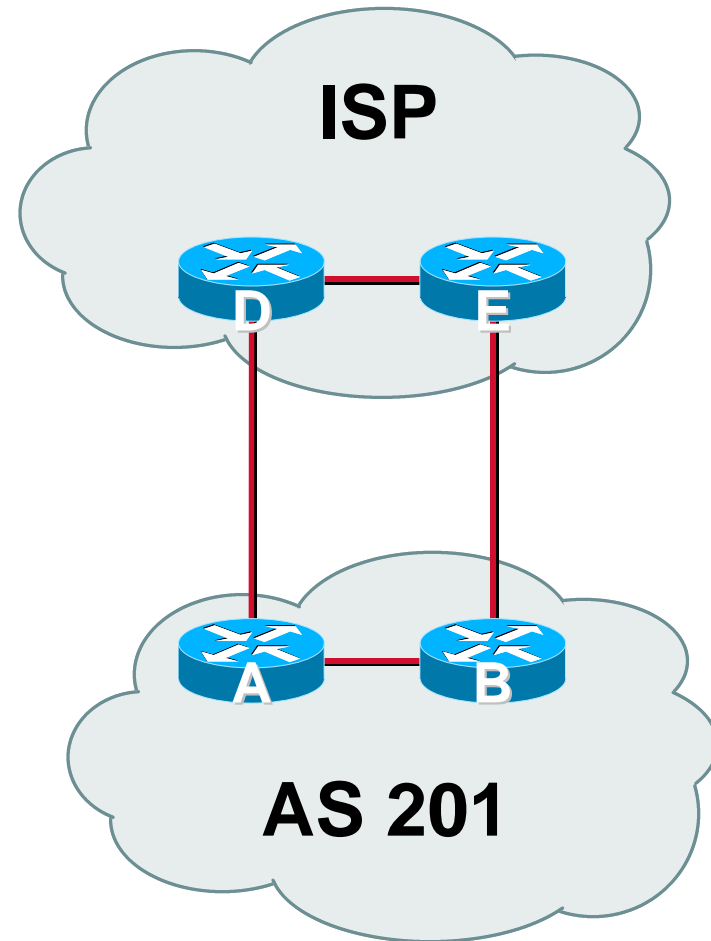

Multiple Sessions to ISPs

- **Planning and some work required to achieve load sharing**

Point default towards one ISP

Learn selected prefixes from second ISP

Modify the number of prefixes learnt to achieve acceptable load sharing


- **No magic solution**

Private-AS - Application

- **Applications**

ISP with single-homed customers

corporate network with several regions and connections to the Internet only in the core

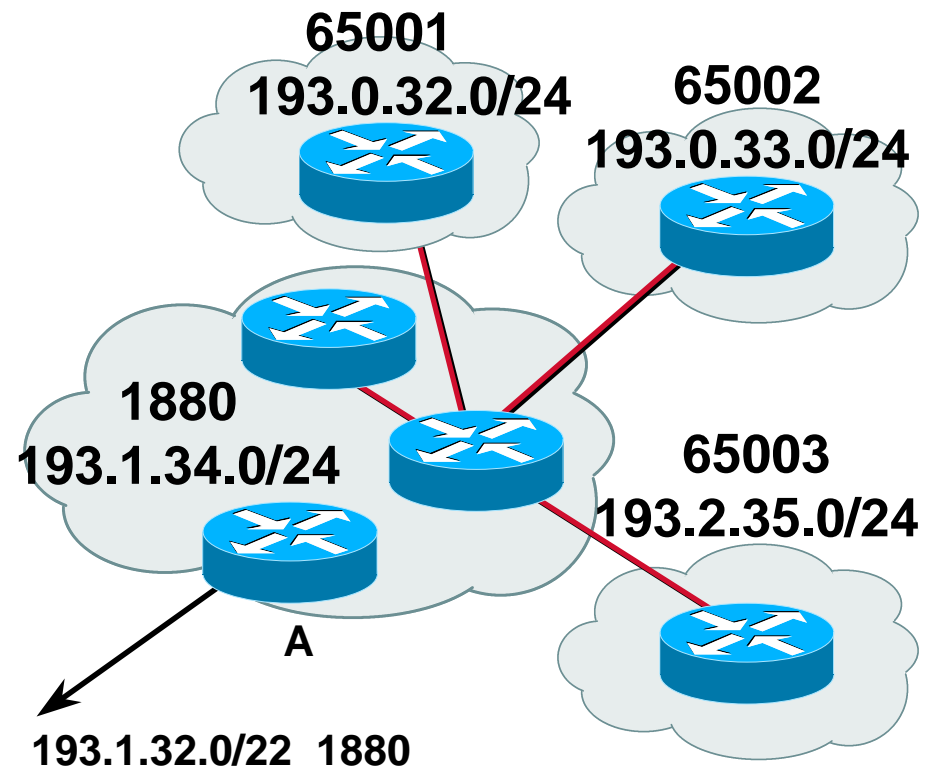

Private-AS Removal

- **neighbor x.x.x.x remove-private-AS**

- **Rules:**

available for eBGP neighbors only

if the update has AS_PATH made up of private-AS numbers, the private-AS will be dropped

if the AS_PATH includes private and public AS numbers, private AS number will not be removed...it is a configuration error!

if AS_PATH contains the AS number of the eBGP neighbor, the private-AS numbers will not be removed

if used with confederations, it will work as long as the private AS numbers are after the confederation portion of the AS_PATH




Two links to the same ISP

Basic - No Redundancy

Two links to the same ISP

- **Can use BGP for this to aid loadsharing**
 - use a private AS (ASN > 64511)**
- **upstream ISP proxy aggregates**
 - in other words, announces only your address block to the Internet (as would be done if you had one statically routed connection)**

Two links to the same ISP

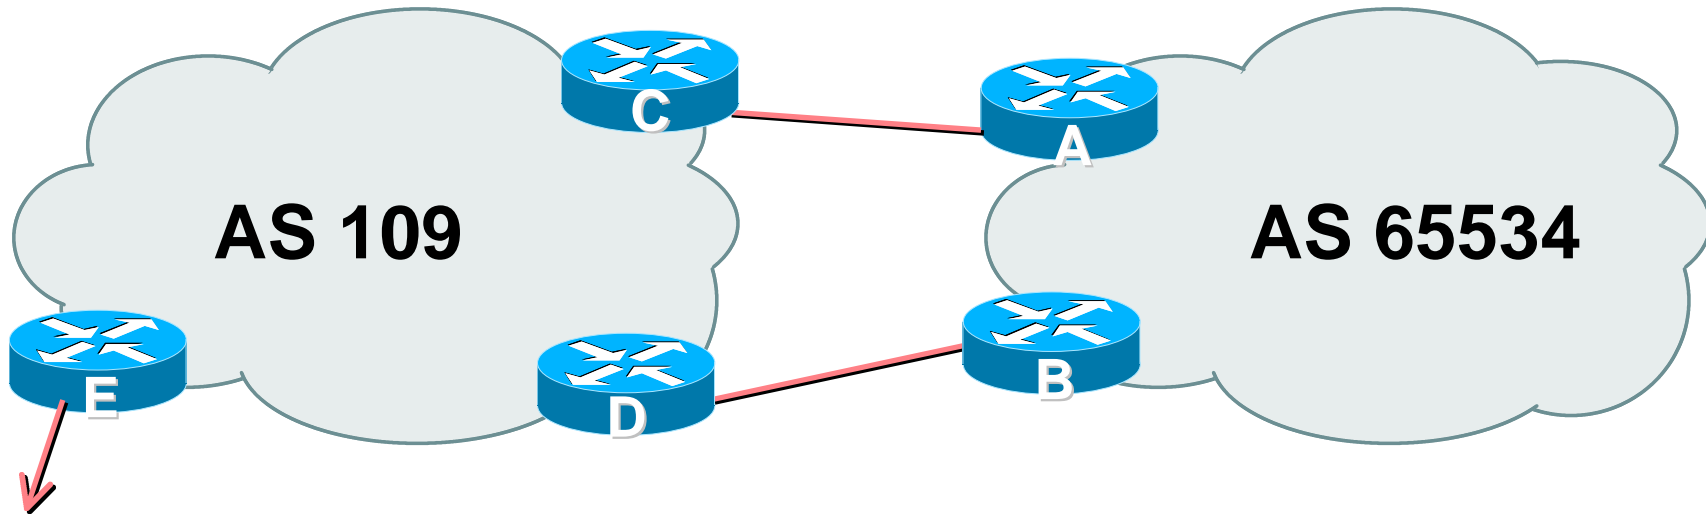

- **AS109 proxy aggregates for AS 65534**

Two links to the same ISP

- **Split /19 and announce as two /20s, one on each link**

basic inbound loadsharing

- **Example has no practical use, but demonstrates the principles**

Two links to the same ISP

- **Router A Configuration**

```
router bgp 65534
  network 221.10.0.0 mask 255.255.240.0
  network 221.10.16.0 mask 255.255.240.0
  neighbor 222.222.10.2 remote-as 109
  neighbor 222.222.10.2 prefix-list routerC out
  neighbor 222.222.10.2 prefix-list default in
!
ip prefix-list default permit 0.0.0.0/0
ip prefix-list routerC permit 221.10.0.0/20
!
ip route 221.10.0.0 255.255.240.0 null0
ip route 221.10.16.0 255.255.240.0 null0
```

Two links to the same ISP

- **Router B Configuration**

```
router bgp 65534
  network 221.10.0.0 mask 255.255.240.0
  network 221.10.16.0 mask 255.255.240.0
  neighbor 222.222.10.6 remote-as 109
  neighbor 222.222.10.6 prefix-list routerD out
  neighbor 222.222.10.6 prefix-list default in
!
ip prefix-list default permit 0.0.0.0/0
ip prefix-list routerD permit 221.10.16.0/20
!
ip route 221.10.0.0 255.255.240.0 null0
ip route 221.10.16.0 255.255.240.0 null0
```

Two links to the same ISP

- **Router C Configuration**

```
router bgp 109
```

```
neighbor 222.222.10.1 remote-as 65534
```

```
neighbor 222.222.10.1 default-originate
```

```
neighbor 222.222.10.1 prefix-list Customer in
```

```
neighbor 222.222.10.1 prefix-list default out
```

```
!
```

```
ip prefix-list Customer permit 221.10.0.0/20
```

```
ip prefix-list default permit 0.0.0.0/0
```


Two links to the same ISP

- **Router D Configuration**

```
router bgp 109
```

```
neighbor 222.222.10.5 remote-as 65534
```

```
neighbor 222.222.10.5 default-originate
```

```
neighbor 222.222.10.5 prefix-list Customer in
```

```
neighbor 222.222.10.5 prefix-list default out
```

```
!
```

```
ip prefix-list Customer permit 221.10.16.0/20
```

```
ip prefix-list default permit 0.0.0.0/0
```

Two links to the same ISP

- **Router E is AS109 border router**
removes prefixes in the private AS
from external announcements
implements the proxy aggregation for
the customer prefixes

Two links to the same ISP

- **Router E Configuration**

```
router bgp 109
```

```
network 221.10.0.0 mask 255.255.224.0
```

```
neighbor 222.222.10.17 remote-as 110
```

```
neighbor 222.222.10.17 filter-list 1 out
```

```
!
```

```
ip route 221.10.0.0 255.255.224.0 null0
```

```
!
```

```
ip as-path access-list 1 deny ^65534$
```

```
ip as-path access-list 1 permit ^$
```

- **Private AS still visible inside AS109**

Two links to the same ISP

- **Big Problem:**

- no backup in case of link failure

- **/19 address block not announced**

- **AS Path filtering “awkward”**

- easier to use bgp command


- `neighbor x.x.x.x remove-private-AS`



Two links to the same ISP

**One link primary, the other link
backup only**

Two links to the same ISP

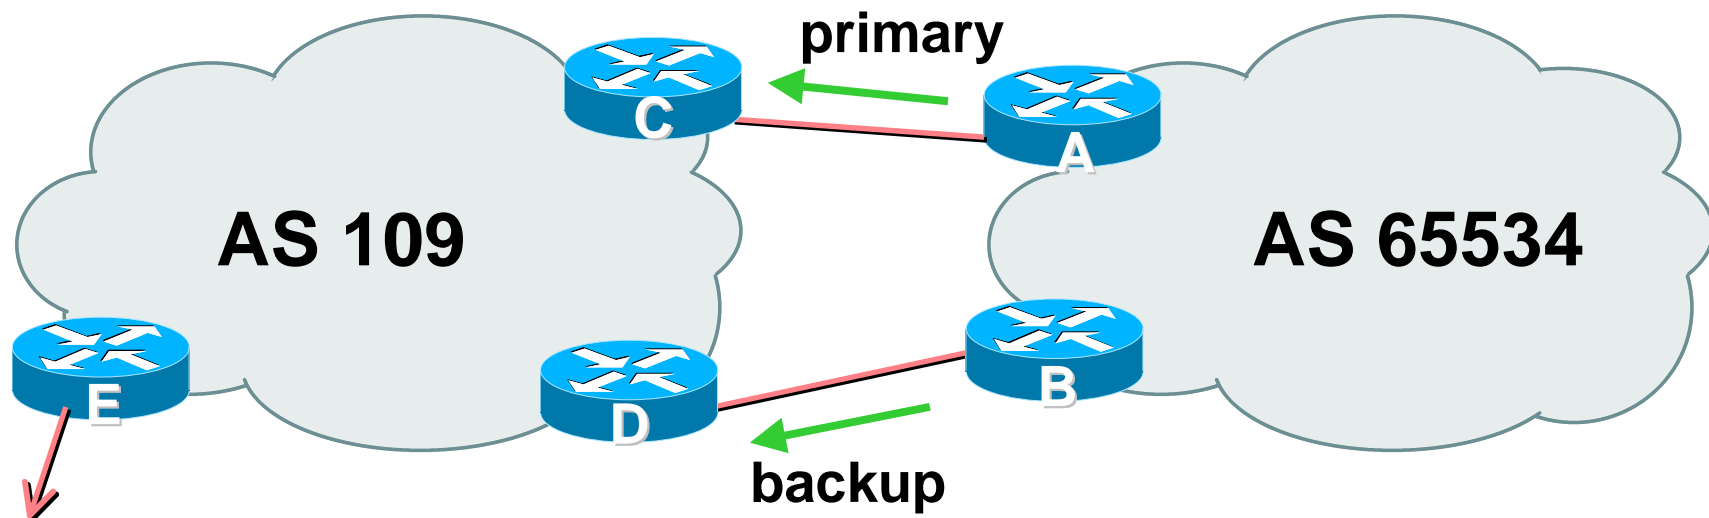

- **AS109 removes private AS and any customer subprefixes from Internet announcement**

Two links to the same ISP (one as backup only)

- **Announce /19 aggregate on each link**
primary link makes standard announcement
backup link increases metric on outbound, and
reduces local-pref on inbound
- **When one link fails, the announcement of the /19 aggregate via the other link ensures continued connectivity**

Two links to the same ISP (one as backup only)

- **Router A Configuration**

```
router bgp 65534
  network 221.10.0.0 mask 255.255.224.0
  neighbor 222.222.10.2 remote-as 109
  neighbor 222.222.10.2 description RouterC
  neighbor 222.222.10.2 prefix-list aggregate out
  neighbor 222.222.10.2 prefix-list default in
!
ip prefix-list aggregate permit 221.10.0.0/19
ip prefix-list default permit 0.0.0.0/0
!
```


Two links to the same ISP (one as backup only)

- **Router B Configuration**

```
router bgp 65534
  network 221.10.0.0 mask 255.255.224.0
  neighbor 222.222.10.6 remote-as 109
  neighbor 222.222.10.6 description RouterD
  neighbor 222.222.10.6 prefix-list aggregate out
  neighbor 222.222.10.6 route-map routerD-out out
  neighbor 222.222.10.6 prefix-list default in
  neighbor 222.222.10.6 route-map routerD-in in
!
..next slide
```

Two links to the same ISP (one as backup only)

```
ip prefix-list aggregate permit 221.10.0.0/19
ip prefix-list default permit 0.0.0.0/0
!
route-map routerD-out permit 10
    match ip address prefix-list aggregate
    set metric 10
route-map routerD-out permit 20
!
route-map routerD-in permit 10
    set local-preference 90
!
```

Two links to the same ISP (one as backup only)

- **Router C Configuration (main link)**

```
router bgp 109
```

```
neighbor 222.222.10.1 remote-as 65534
```

```
neighbor 222.222.10.1 default-originate
```

```
neighbor 222.222.10.1 prefix-list Customer in
```

```
neighbor 222.222.10.1 prefix-list default out
```

```
!
```

```
ip prefix-list Customer permit 221.10.0.0/19
```

```
ip prefix-list default permit 0.0.0.0/0
```

Two links to the same ISP (one as backup only)

- **Router D Configuration (backup link)**

```
router bgp 109
```

```
neighbor 222.222.10.5 remote-as 65534
```

```
neighbor 222.222.10.5 default-originate
```

```
neighbor 222.222.10.5 prefix-list Customer in
```

```
neighbor 222.222.10.5 prefix-list default out
```

```
!
```

```
ip prefix-list Customer permit 221.10.0.0/19
```

```
ip prefix-list default permit 0.0.0.0/0
```


Two links to the same ISP (one as backup only)

- **Router E Configuration**

```
router bgp 109
  neighbor 222.222.10.17 remote-as 110
  neighbor 222.222.10.17 remove-private-AS
  neighbor 222.222.10.17 prefix-list Customer out
!
ip prefix-list Customer permit 221.10.0.0/19
```


- **Router E removes the private AS and customer's subprefixes from external announcements**
- **Private AS still visible inside AS109**



Two links to the same ISP

**With Redundancy and
Loadsharing**

Two links to the same ISP (with redundancy)

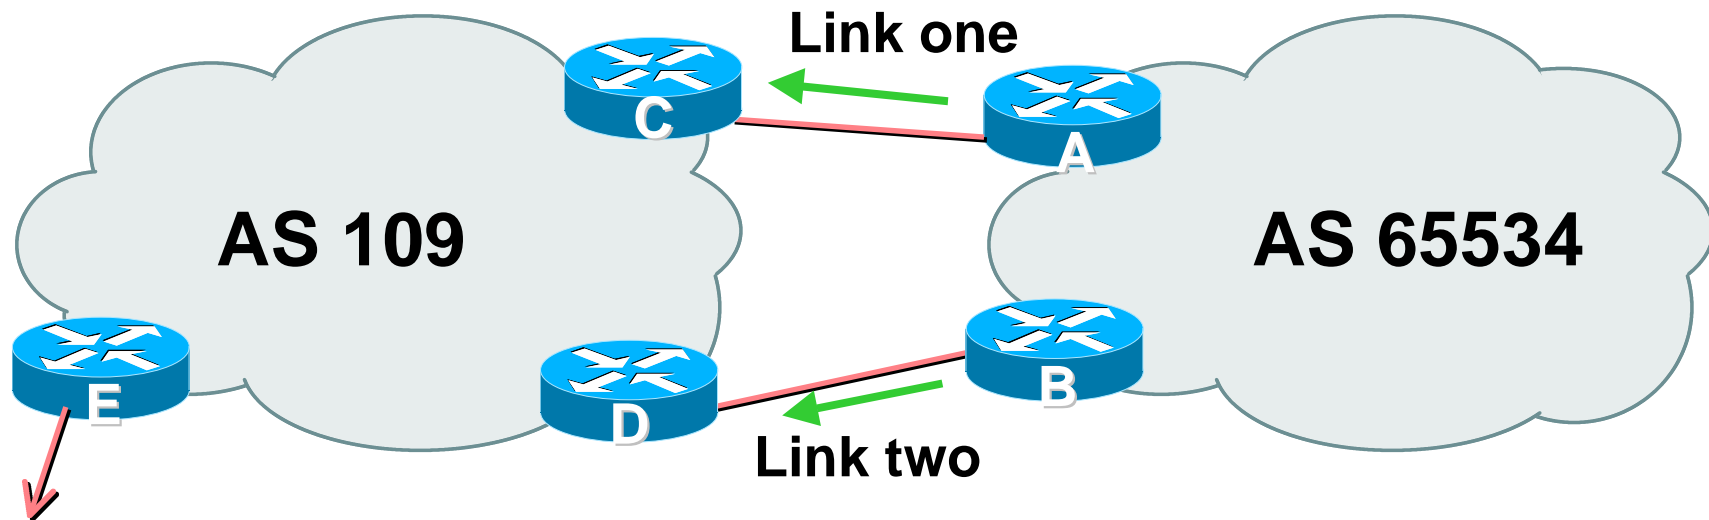

- **AS109 removes private AS and any customer subprefixes from Internet announcement**

Loadsharing to the same ISP

- **Announce /19 aggregate on each link**
- **Split /19 and announce as two /20s, one on each link**

basic inbound loadsharing

assumes equal circuit capacity and even spread of traffic across address block

- **Vary the split until “perfect” loadsharing achieved**

Two links to the same ISP

- Router A Configuration

```
router bgp 65534
  network 221.10.0.0 mask 255.255.224.0
  network 221.10.0.0 mask 255.255.240.0
  neighbor 222.222.10.2 remote-as 109
  neighbor 222.222.10.2 prefix-list routerC out
  neighbor 222.222.10.2 prefix-list default in
!
ip prefix-list default permit 0.0.0.0/0
ip prefix-list routerC permit 221.10.0.0/20
ip prefix-list routerC permit 221.10.0.0/19
!
ip route 221.10.0.0 255.255.240.0 null0
ip route 221.10.0.0 255.255.224.0 null0
```

Two links to the same ISP

- **Router B Configuration**

```
router bgp 65534
  network 221.10.0.0 mask 255.255.224.0
  network 221.10.16.0 mask 255.255.240.0
  neighbor 222.222.10.6 remote-as 109
  neighbor 222.222.10.6 prefix-list routerD out
  neighbor 222.222.10.6 prefix-list default in
!
ip prefix-list default permit 0.0.0.0/0
ip prefix-list routerD permit 221.10.16.0/20
ip prefix-list routerD permit 221.10.0.0/19
!
ip route 221.10.0.0 255.255.224.0 null0
ip route 221.10.16.0 255.255.240.0 null0
```

Loadsharing to the same ISP

- **Default route for outbound traffic?**

Use default-information originate for the IGP and rely on IGP metrics for nearest exit

e.g. on router A:

```
router ospf 65534
```

```
default-information originate metric 2 metric-type 1
```

Two links to the same ISP

- **Router C Configuration**

```
router bgp 109
```

```
neighbor 222.222.10.1 remote-as 65534
```

```
neighbor 222.222.10.1 default-originate
```

```
neighbor 222.222.10.1 prefix-list Customer in
```

```
neighbor 222.222.10.1 prefix-list default out
```

```
!
```

```
ip prefix-list Customer permit 221.10.0.0/19 le 20
```

```
ip prefix-list default permit 0.0.0.0/0
```

- **Router C only allows in /19 and /20 prefixes from customer block**

Two links to the same ISP

- **Router D Configuration**

```
router bgp 109
```

```
neighbor 222.222.10.5 remote-as 65534
```

```
neighbor 222.222.10.5 default-originate
```

```
neighbor 222.222.10.5 prefix-list Customer in
```

```
neighbor 222.222.10.5 prefix-list default out
```

```
!
```

```
ip prefix-list Customer permit 221.10.0.0/19 le 20
```

```
ip prefix-list default permit 0.0.0.0/0
```

- **Router D only allows in /19 and /20 prefixes from customer block**

Two links to the same ISP

- **Router E is AS109 border router**
removes subprefixes in the private AS
from external announcements

removes the private AS from external
announcement of the customer /19

Two links to the same ISP (with redundancy)

- **Router E Configuration**

```
router bgp 109
  neighbor 222.222.10.17 remote-as 110
  neighbor 222.222.10.17 remove-private-AS
  neighbor 222.222.10.17 prefix-list Customer out
!
ip prefix-list Customer permit 221.10.0.0/19
```

- **Private AS still visible inside AS109**

Loadsharing to the same ISP


- **Loadsharing configuration is only on customer router**
- **Upstream ISP has to**
 - remove customer subprefixes from external announcements**
 - remove private AS from external announcements**
- **Could also use BGP communities**



Two links to the same ISP

**Multiple Dualhomed Customers
(RFC2270)**

Multiple Dualhomed Customers (RFC2270)

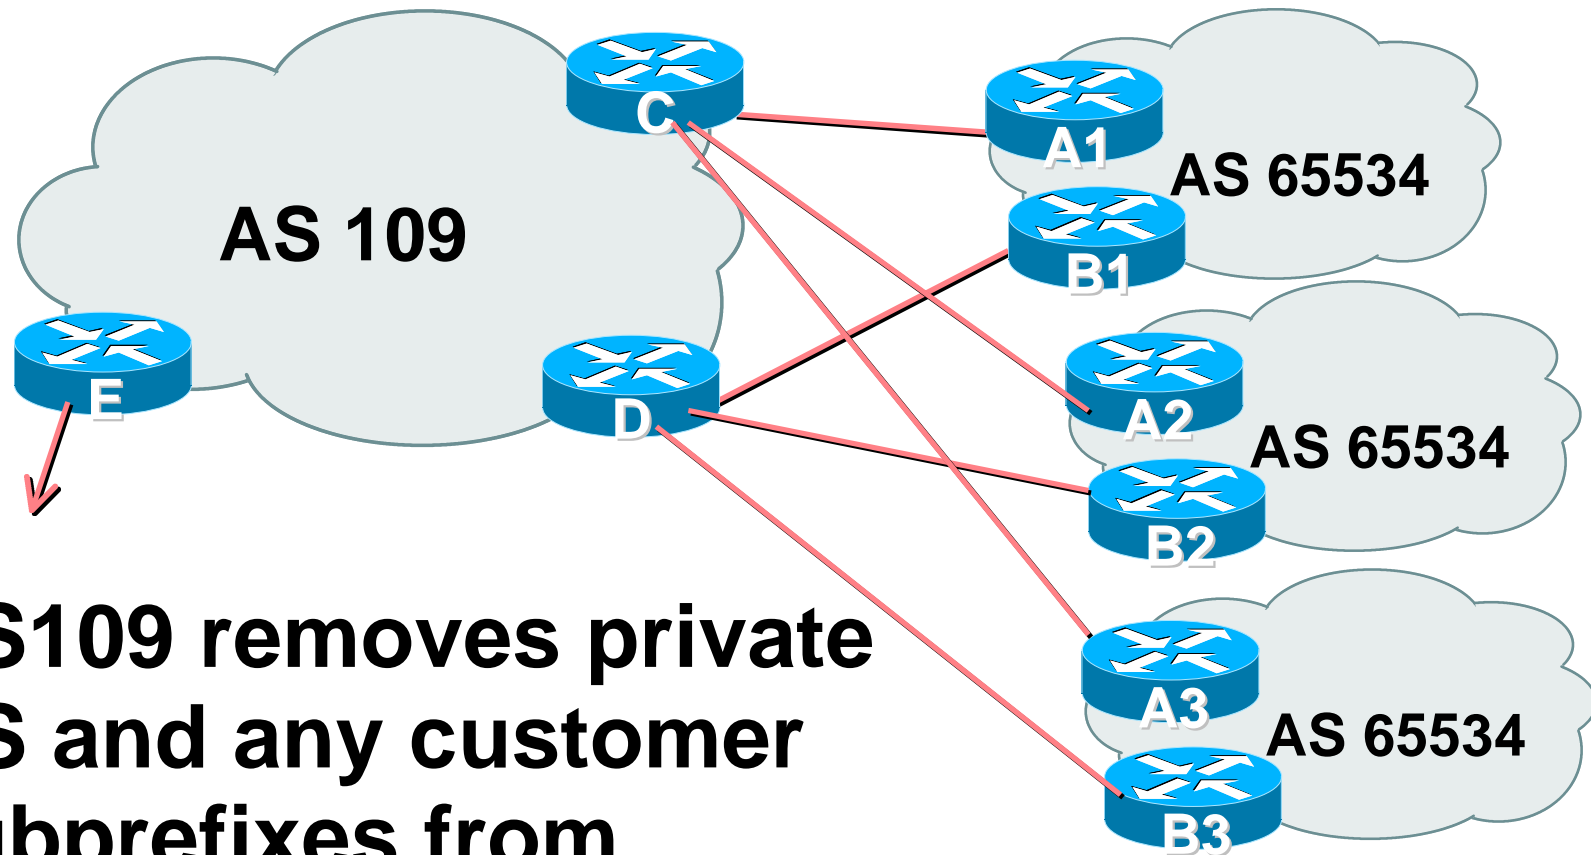

- **AS109 removes private AS and any customer subprefixes from Internet announcement**

Multiple Dualhomed Customers

- **Customer announcements as per previous example**
- **Use the *same* private AS for each customer**
 - documented in RFC2270**
 - address space is not overlapping**
 - each customer hears default only**
- **Router *A_n* and *B_n* configuration same as Router A and B previously**

Two links to the same ISP

- **Router A1 Configuration**

```
router bgp 65534
  network 221.10.0.0 mask 255.255.224.0
  network 221.10.0.0 mask 255.255.240.0
  neighbor 222.222.10.2 remote-as 109
  neighbor 222.222.10.2 prefix-list routerC out
  neighbor 222.222.10.2 prefix-list default in
!
ip prefix-list default permit 0.0.0.0/0
ip prefix-list routerC permit 221.10.0.0/20
ip prefix-list routerC permit 221.10.0.0/19
!
ip route 221.10.0.0 255.255.240.0 null0
ip route 221.10.0.0 255.255.224.0 null0
```


Two links to the same ISP

- **Router B1 Configuration**

```
router bgp 65534
  network 221.10.0.0 mask 255.255.224.0
  network 221.10.16.0 mask 255.255.240.0
  neighbor 222.222.10.6 remote-as 109
  neighbor 222.222.10.6 prefix-list routerD out
  neighbor 222.222.10.6 prefix-list default in
!
ip prefix-list default permit 0.0.0.0/0
ip prefix-list routerD permit 221.10.16.0/20
ip prefix-list routerD permit 221.10.0.0/19
!
ip route 221.10.0.0 255.255.224.0 null0
ip route 221.10.16.0 255.255.240.0 null0
```

Multiple Dualhomed Customers

- Router C Configuration

```
router bgp 109
```

```
neighbor bgp-customers peer-group
```

```
neighbor bgp-customers remote-as 65534
```

```
neighbor bgp-customers default-originate
```

```
neighbor bgp-customers prefix-list default out
```

```
neighbor 222.222.10.1 peer-group bgp-customers
```

```
neighbor 222.222.10.1 description Customer One
```

```
neighbor 222.222.10.1 prefix-list Customer1 in
```

```
neighbor 222.222.10.9 peer-group bgp-customers
```

```
neighbor 222.222.10.9 description Customer Two
```

```
neighbor 222.222.10.9 prefix-list Customer2 in
```

Multiple Dualhomed Customers

```
neighbor 222.222.10.17 peer-group bgp-customers
neighbor 222.222.10.17 description Customer Three
neighbor 222.222.10.17 prefix-list Customer3 in
!
ip prefix-list Customer1 permit 221.10.0.0/19 le 20
ip prefix-list Customer2 permit 221.16.64.0/19 le 20
ip prefix-list Customer3 permit 221.14.192.0/19 le 20
ip prefix-list default permit 0.0.0.0/0
```

- Router C only allows in /19 and /20 prefixes from customer block

Multiple Dualhomed Customers

- Router D Configuration

```
router bgp 109
```

```
neighbor bgp-customers peer-group
```

```
neighbor bgp-customers remote-as 65534
```

```
neighbor bgp-customers default-originate
```

```
neighbor bgp-customers prefix-list default out
```

```
neighbor 222.222.10.5 peer-group bgp-customers
```

```
neighbor 222.222.10.5 description Customer One
```

```
neighbor 222.222.10.5 prefix-list Customer1 in
```

```
neighbor 222.222.10.13 peer-group bgp-customers
```

```
neighbor 222.222.10.13 description Customer Two
```

```
neighbor 222.222.10.13 prefix-list Customer2 in
```


Multiple Dualhomed Customers

```
neighbor 222.222.10.21 peer-group bgp-customers
neighbor 222.222.10.21 description Customer Three
neighbor 222.222.10.21 prefix-list Customer3 in
!
ip prefix-list Customer1 permit 221.10.0.0/19 le 20
ip prefix-list Customer2 permit 221.16.64.0/19 le 20
ip prefix-list Customer3 permit 221.14.192.0/19 le 20
ip prefix-list default permit 0.0.0.0/0
```

- Router D only allows in /19 and /20 prefixes from customer block

Multiple Dualhomed Customers

- **Router E Configuration is as previously assumes customer address space is not part of upstream's address block**

```
router bgp 109
  neighbor 222.222.10.17 remote-as 110
  neighbor 222.222.10.17 remove-private-AS
  neighbor 222.222.10.17 prefix-list Customers out
!
ip prefix-list Customers permit 221.10.0.0/19
ip prefix-list Customers permit 221.16.64.0/19
ip prefix-list Customers permit 221.14.192.0/19
```

- **Private AS still visible inside AS109**

Multiple Dualhomed Customers

- If customers' prefixes come from ISP's address block
do **NOT** announce them to the Internet
announce **ISP aggregate only**

- Router E configuration:

```
router bgp 109
  neighbor 222.222.10.17 remote-as 110
  neighbor 222.222.10.17 prefix-list my-aggregate out
!
ip prefix-list my-aggregate permit 221.8.0.0/13
```

Multihoming Summary

- **Use private AS for multihoming to upstream**
- **Leak subprefixes to upstream only to aid loadsharing**
- **Upstream router E configuration is uniform across all scenarios**



Two links to different ISPs

Two links to different ISPs

- **Use Public ASes**
or use private AS if agreed with the other ISP
- **Address space comes from**
both upstreams (PA space) or
Regional Internet Registry (PI space)
- **Configuration concepts very similar**




Two links to different ISPs

Basic - No Redundancy

Two links to different ISPs

- **Example for PI space**
ISP network, or large enterprise site
- **Split /19 and announce as two /20s,
one on each link**
basic inbound loadsharing

Two links to different ISPs

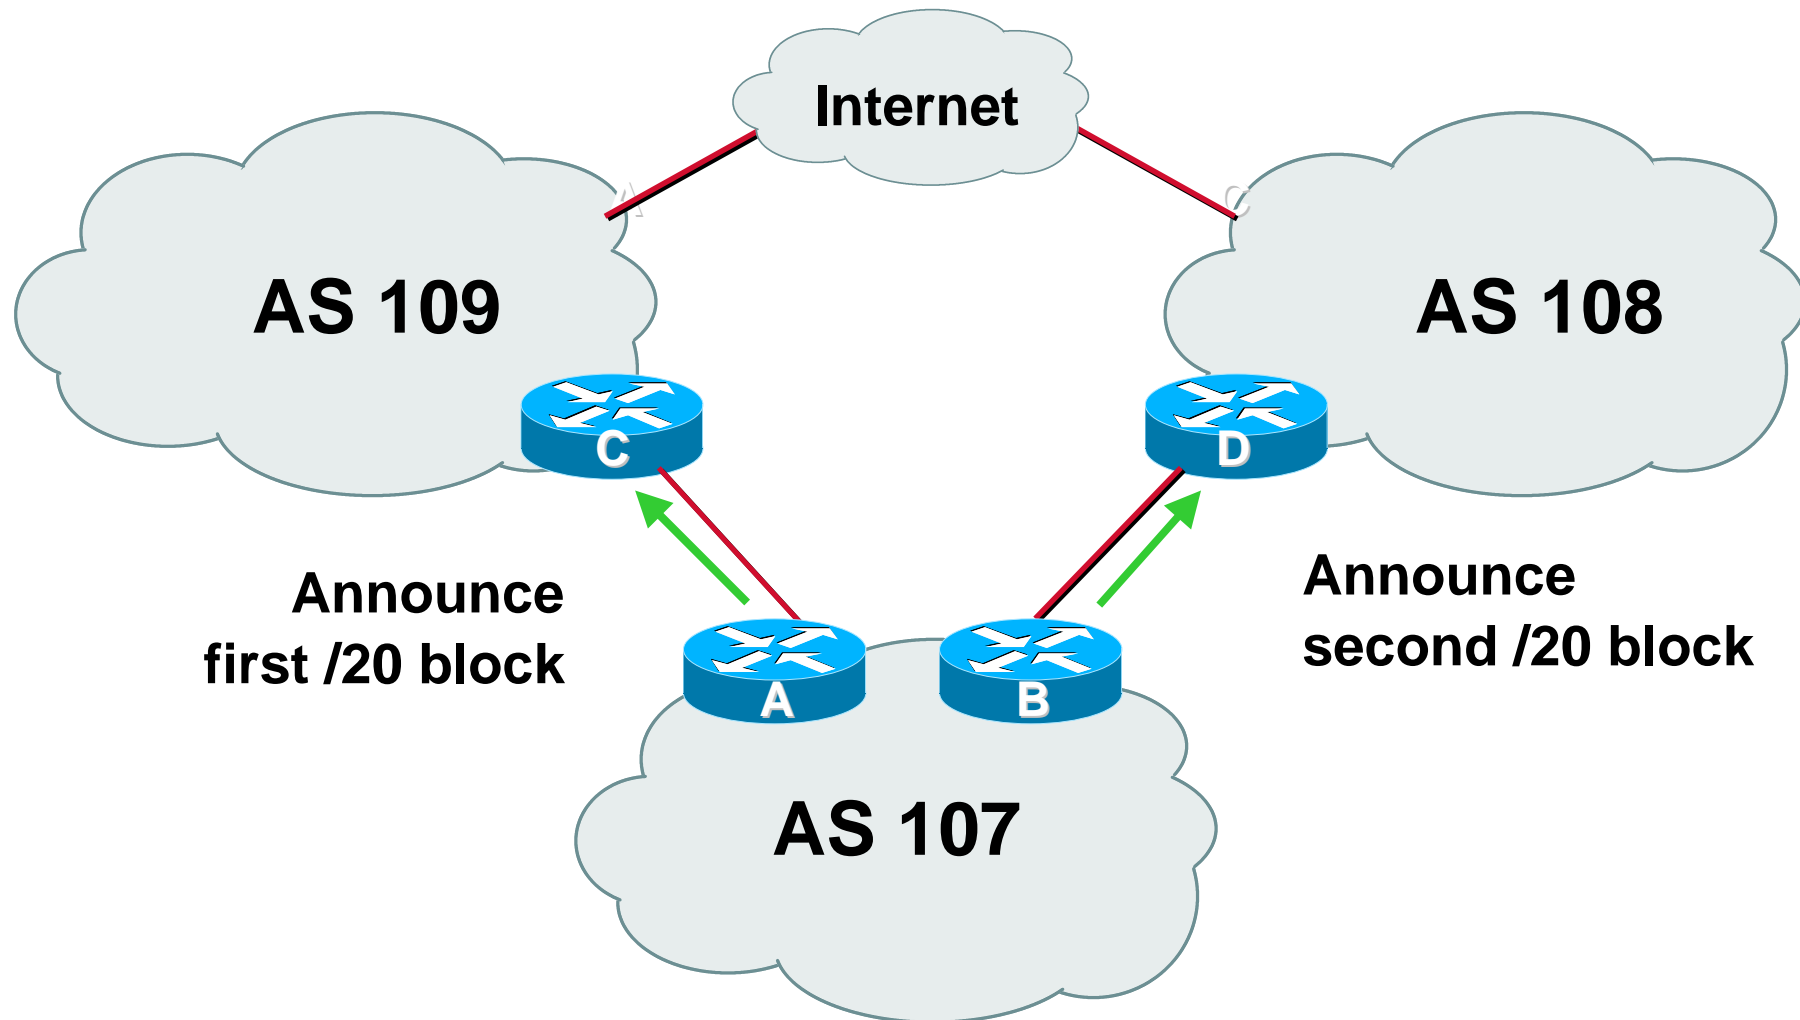

Two links to different ISPs

- **Router A Configuration**

```
router bgp 107
  network 221.10.0.0 mask 255.255.240.0
  neighbor 222.222.10.1 remote-as 109
  neighbor 222.222.10.1 prefix-list routerC out
  neighbor 222.222.10.1 prefix-list default in
!
ip prefix-list default permit 0.0.0.0/0
ip prefix-list routerC permit 221.10.0.0/20
```

Two links to different ISPs

- **Router B Configuration**

```
router bgp 107
```

```
network 221.10.16.0 mask 255.255.240.0
```

```
neighbor 220.1.5.1 remote-as 108
```

```
neighbor 220.1.5.1 prefix-list routerD out
```

```
neighbor 220.1.5.1 prefix-list default in
```

```
!
```

```
ip prefix-list default permit 0.0.0.0/0
```

```
ip prefix-list routerD permit 221.10.16.0/20
```

Two links to different ISPs

- **Router C Configuration**

```
router bgp 109
```

```
neighbor 221.10.1.1 remote-as 107
```

```
neighbor 221.10.1.1 default-originate
```

```
neighbor 221.10.1.1 prefix-list AS107cust in
```

```
neighbor 221.10.1.1 prefix-list default-out out
```

```
!
```

- **Router C only announces default to AS 107**
- **Router C only accepts AS107's prefix block**

Two links to different ISPs

- **Router D Configuration**

```
router bgp 108
```

```
neighbor 220.1.5.1 remote-as 107
```

```
neighbor 220.1.5.1 default-originate
```

```
neighbor 220.1.5.1 prefix-list AS107cust in
```

```
neighbor 220.1.5.1 prefix-list default-out out
```

```
!
```

- **Router D only announces default to AS 107**
- **Router D only accepts AS107's prefix block**

Two links to different ISPs (no redundancy)

- **Big Problem:**
 - no backup in case of link failure
- **/19 address block not announced**



Two links to different ISPs With Redundancy


Two links to different ISPs (with redundancy)

- **Announce /19 aggregate on each link**
- **Split /19 and announce as two /20s, one on each link**

basic inbound loadsharing

- **When one link fails, the announcement of the /19 aggregate via the other ISP ensures continued connectivity**

Two links to different ISPs (with redundancy)

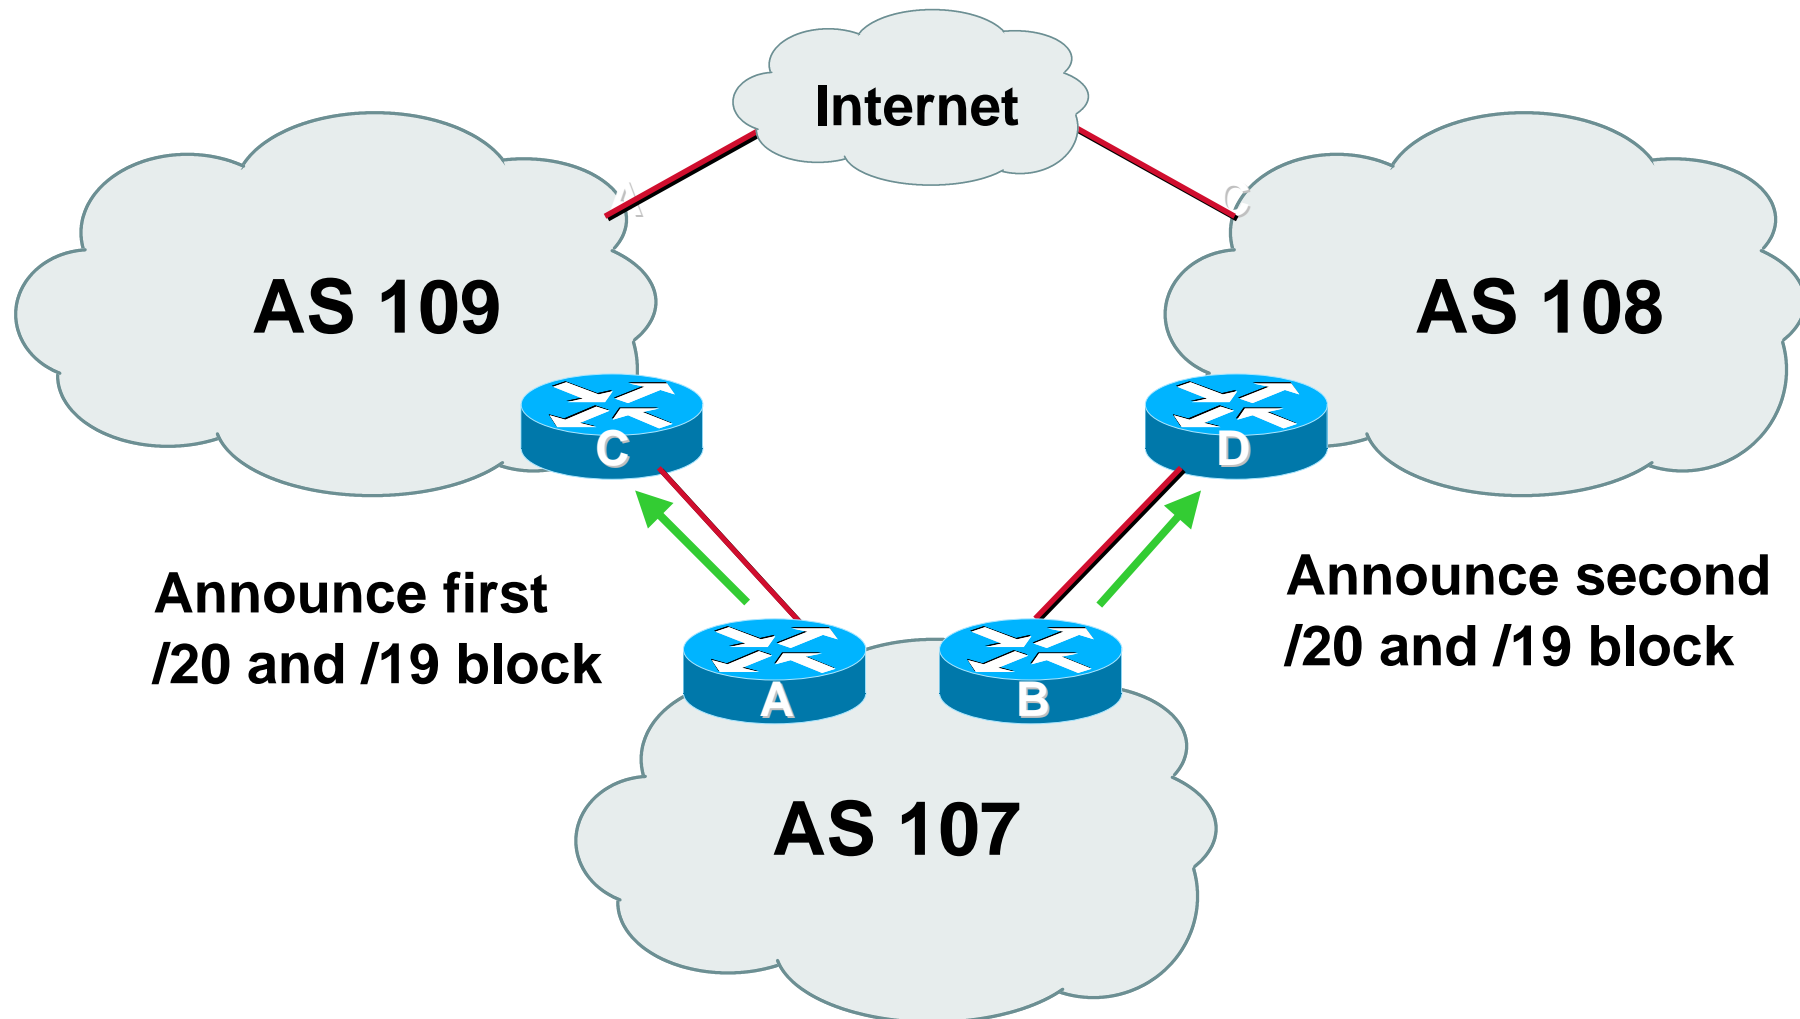

Two links to different ISPs (with redundancy)

- **Router A Configuration**

```
router bgp 107
  network 221.10.0.0 mask 255.255.224.0
  network 221.10.0.0 mask 255.255.240.0
  neighbor 222.222.10.1 remote-as 109
  neighbor 222.222.10.1 prefix-list firstblock out
  neighbor 222.222.10.1 prefix-list default in
!
ip prefix-list default permit 0.0.0.0/0
!
ip prefix-list firstblock permit 221.10.0.0/20
ip prefix-list firstblock permit 221.10.0.0/19
```

Two links to different ISPs (with redundancy)

- **Router B Configuration**

```
router bgp 107
```

```
network 221.10.0.0 mask 255.255.224.0
```

```
network 221.10.16.0 mask 255.255.240.0
```

```
neighbor 220.1.5.1 remote-as 108
```

```
neighbor 220.1.5.1 prefix-list secondblock out
```

```
neighbor 220.1.5.1 prefix-list default in
```

```
!
```

```
ip prefix-list default permit 0.0.0.0/0
```

```
!
```

```
ip prefix-list secondblock permit 221.10.16.0/20
```

```
ip prefix-list secondblock permit 221.10.0.0/19
```



Two links to different ISPs

**One link primary, the other link
backup only**


Two links to different ISPs (one as backup only)

- **Announce /19 aggregate on each link**

primary link makes standard announcement

backup link lengthens the AS PATH by using AS PATH prepend
- **When one link fails, the announcement of the /19 aggregate via the other link ensures continued connectivity**

Two links to different ISPs (one as backup only)

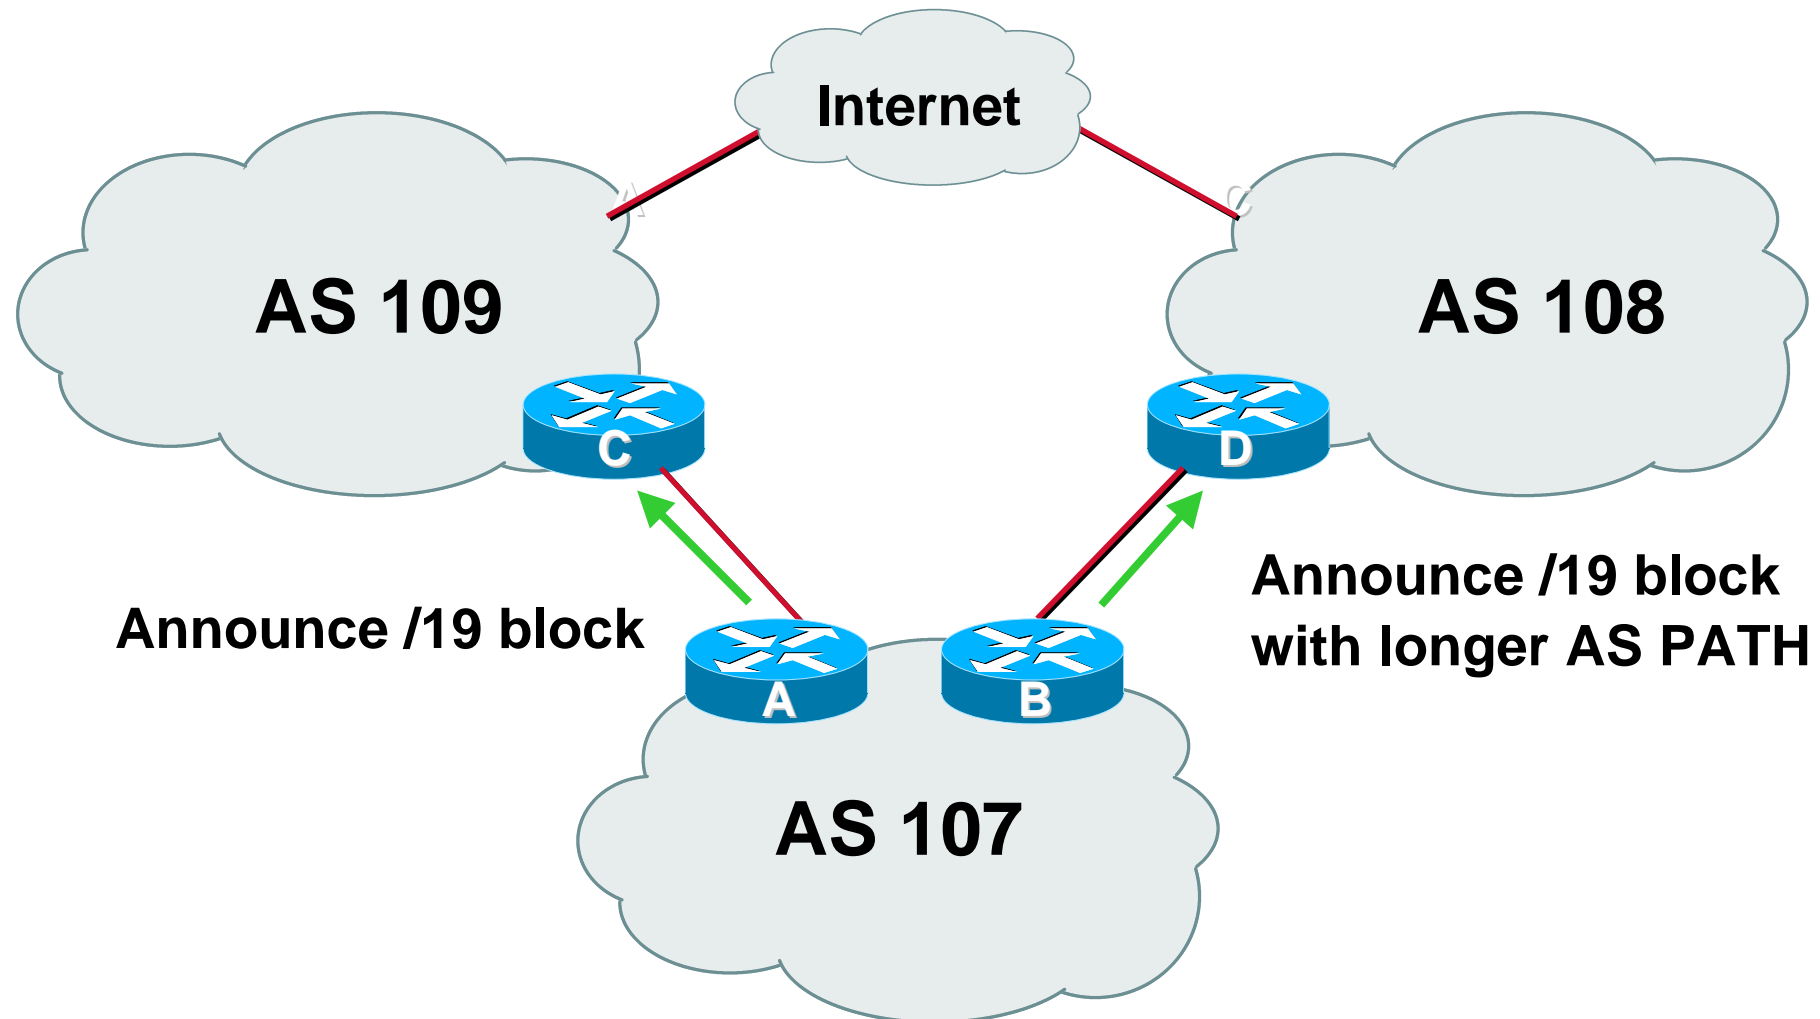

Two links to different ISPs (one as backup only)

- **Router A Configuration**

```
router bgp 107
  network 221.10.0.0 mask 255.255.224.0
  neighbor 222.222.10.1 remote-as 109
  neighbor 222.222.10.1 prefix-list aggregate out
  neighbor 222.222.10.1 prefix-list default in
!
ip prefix-list aggregate permit 221.10.0.0/19
ip prefix-list default permit 0.0.0.0/0
```

Two links to different ISPs (one as backup only)

- **Router B Configuration**

```
router bgp 107
  network 221.10.0.0 mask 255.255.224.0
  neighbor 220.1.5.1 remote-as 108
  neighbor 220.1.5.1 prefix-list aggregate out
  neighbor 220.1.5.1 route-map routerD-out out
  neighbor 220.1.5.1 prefix-list default in
  neighbor 220.1.5.1 route-map routerD-in in
!
..next slide
```


Two links to different ISPs (one as backup only)

- Router B Configuration

!

```
ip prefix-list aggregate permit 221.10.0.0/19
```

```
ip prefix-list default permit 0.0.0.0/0
```

!

```
route-map routerD-out permit 10
```

```
  set as-path prepend 107 107
```

!

```
route-map routerD-in permit 10
```

```
  set local-preference 80
```




Two links to different ISPs

More Controlled Loadsharing

Loadsharing with different ISPs

- **Announce /19 aggregate on each link**
On first link, announce /19 as normal
On second link, announce /19 with longer AS PATH, and announce one /20 subprefix
controls loadsharing between upstreams and the Internet
- **Vary the subprefix size and AS PATH length until “perfect” loadsharing achieved**
- **Still require redundancy!**

Loadsharing with different ISPs

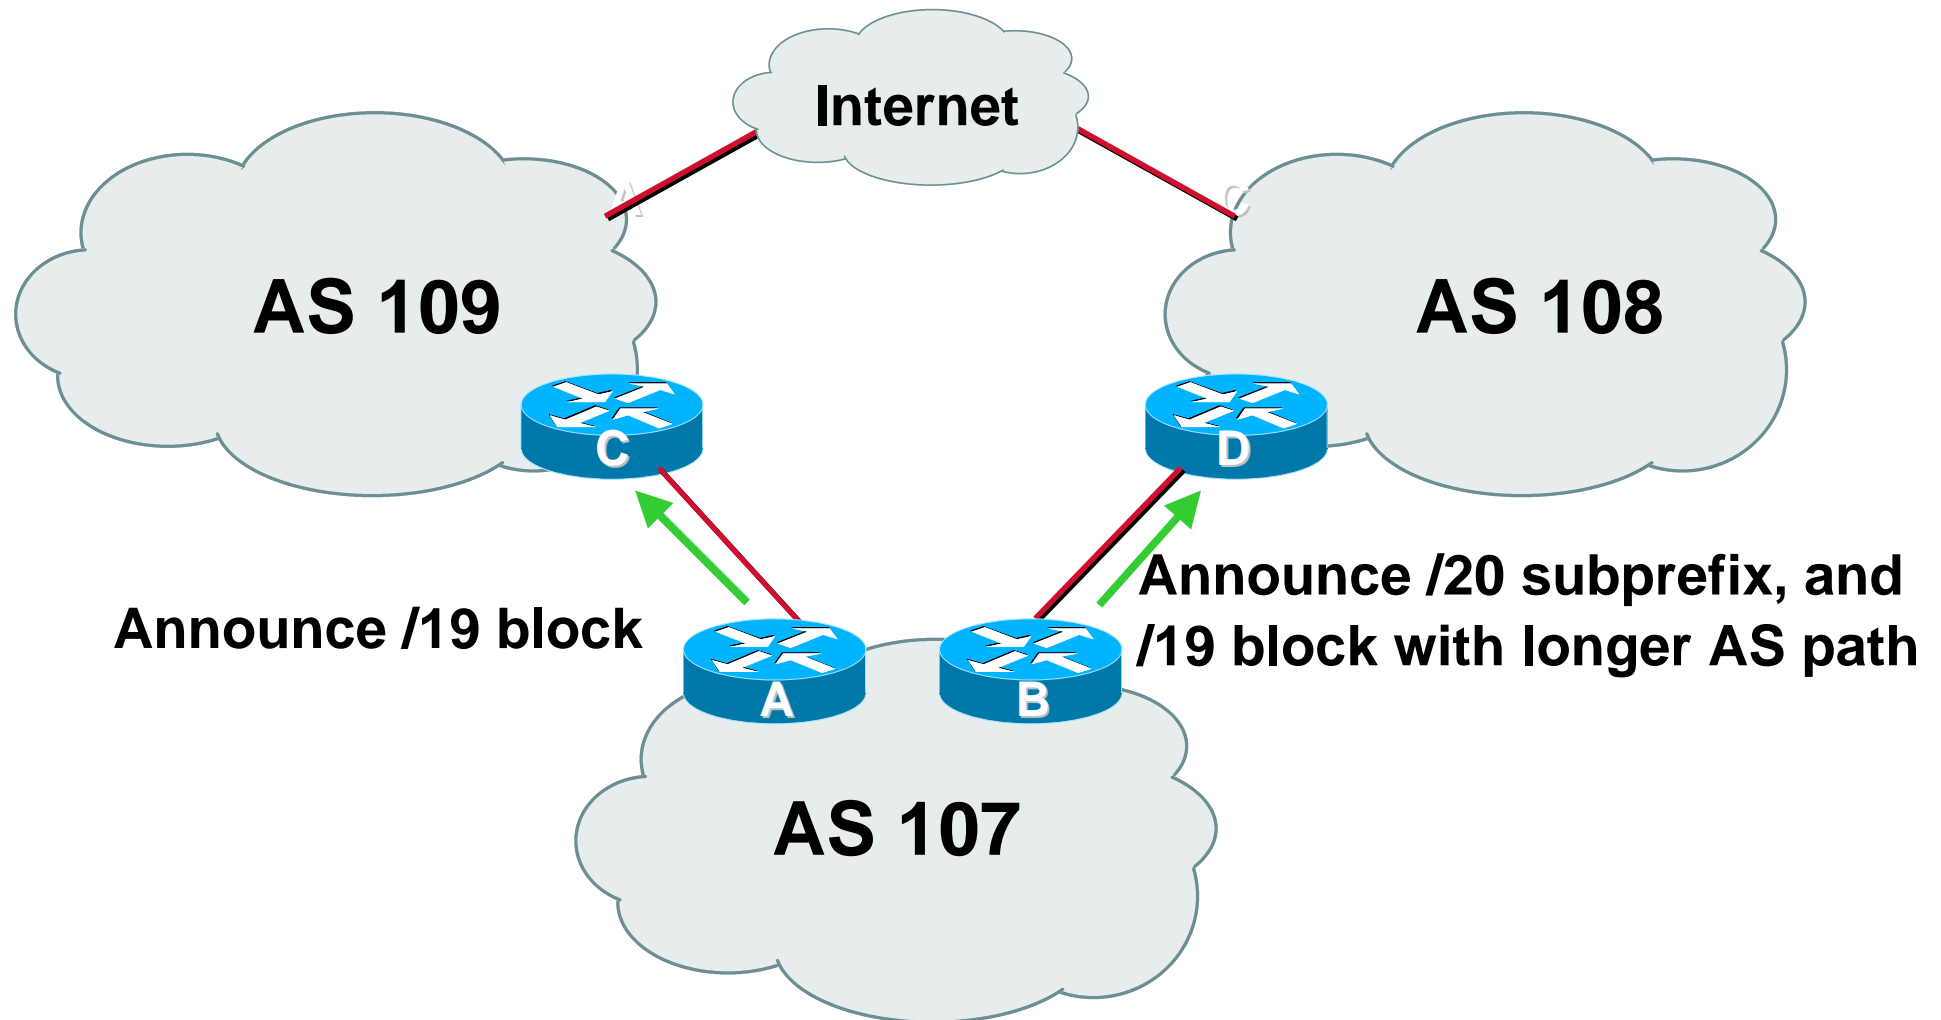

Loadsharing with different ISPs

- **Router A Configuration**

```
router bgp 107
  network 221.10.0.0 mask 255.255.224.0
  neighbor 222.222.10.1 remote-as 109
  neighbor 222.222.10.1 prefix-list default in
  neighbor 222.222.10.1 prefix-list aggregate out
!
ip prefix-list aggregate permit 221.10.0.0/19
```

Loadsharing with different ISPs

- **Router B Configuration**

```
router bgp 107
  network 221.10.0.0 mask 255.255.224.0
  network 221.10.16.0 mask 255.255.240.0
  neighbor 220.1.5.1 remote-as 108
  neighbor 220.1.5.1 prefix-list default in
  neighbor 220.1.5.1 prefix-list subblocks out
  neighbor 220.1.5.1 route-map routerD out
!
..next slide..
```

Loadsharing with different ISPs


```
route-map routerD permit 10
  match ip address prefix-list aggregate
  set as-path prepend 107 107
route-map routerD permit 20
!
ip prefix-list subblocks permit 221.10.0.0/19 le 20
ip prefix-list aggregate permit 221.10.0.0/19
```



Loadsharing Using Communities

4 links - Private AS

Private AS

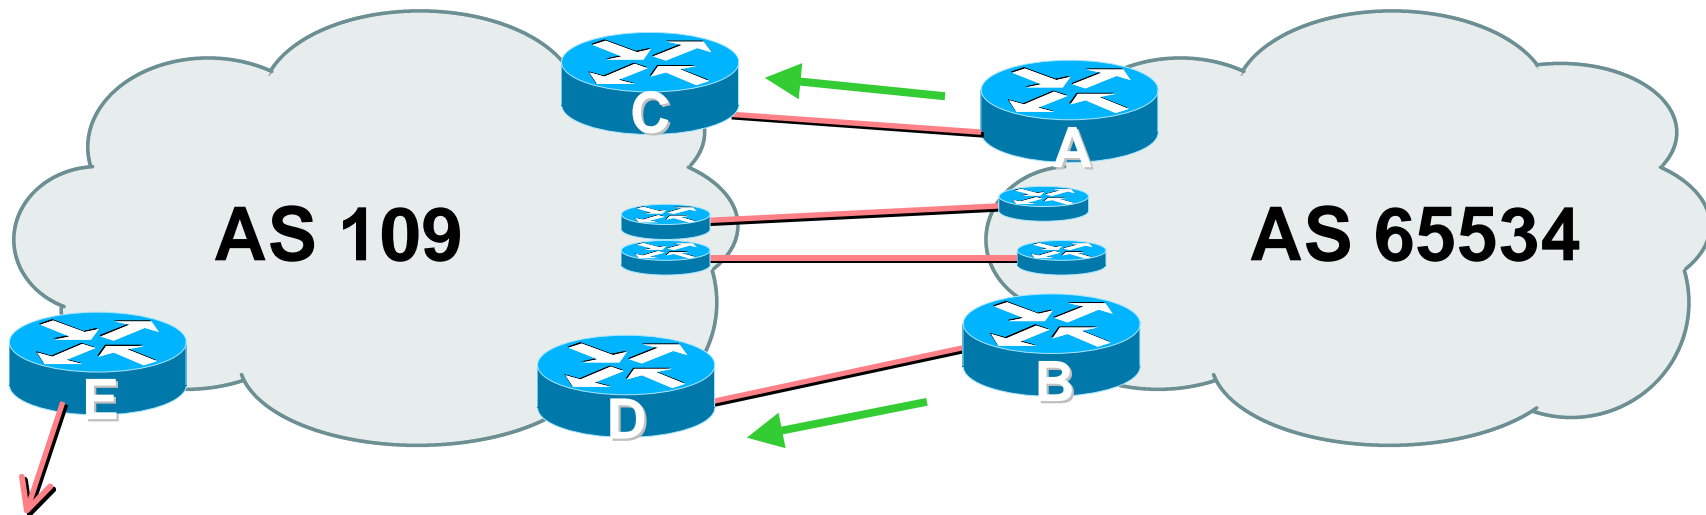

- **AS109 removes private AS and any customer subprefixes from Internet announcement**

Private AS

- **Announce /19 aggregate on each link**
- **Split /19 and announce as four /21s, one on each link**

basic inbound loadsharing

assumes equal circuit capacity and even spread of traffic across address block

- **Vary the split until “perfect” loadsharing achieved**

use the no-export community for subprefixes

Private AS

- **Router A Configuration**

```
router bgp 65534
  network 221.10.0.0 mask 255.255.224.0
  network 221.10.0.0 mask 255.255.248.0
  neighbor 222.222.10.2 remote-as 109
  neighbor 222.222.10.2 send-community
  neighbor 222.222.10.2 prefix-list subblocks1 out
  neighbor 222.222.10.2 route-map routerC-out out
  neighbor 222.222.10.2 prefix-list default in
!
..next slide
```

Private AS

```
ip prefix-list subblocks1 permit 221.10.0.0/19
ip prefix-list subblocks1 permit 221.10.0.0/21
!
ip prefix-list firstblock permit 221.10.0.0/21
ip prefix-list default permit 0.0.0.0/0
!
route-map routerC-out permit 10
    match ip address prefix-list firstblock
    set community no-export
route-map routerC-out permit 20
```


Private AS

- **Router B Configuration**

```
router bgp 65534
  network 221.10.0.0 mask 255.255.224.0
  network 221.10.24.0 mask 255.255.248.0
  neighbor 222.222.20.2 remote-as 109
  neighbor 222.222.20.2 send-community
  neighbor 222.222.20.2 prefix-list subblocks2 out
  neighbor 222.222.20.2 route-map routerD-out out
  neighbor 222.222.20.2 prefix-list default in
!
..next slide
```

Private AS

```
ip prefix-list subblocks2 permit 221.10.0.0/19
ip prefix-list subblocks2 permit 221.10.24.0/21
!
ip prefix-list secondblock permit 221.10.24.0/21
ip prefix-list default permit 0.0.0.0/0
!
route-map routerD-out permit 10
    match ip address prefix-list secondblock
    set community no-export
route-map routerD-out permit 20
```

Private AS

- **Router E Configuration**

```
router bgp 109
```

```
neighbor 222.222.10.17 remote-as 110
```

```
neighbor 222.222.10.17 remove-private-AS
```

```
!
```

- **Router E removes the private AS from external announcements**
- **Router E automatically removes subprefixes with no-export community set**
- **Private AS still visible inside AS109**

Private AS


- **Router C and D configuration is as previously**
- **AS109 routers will not advertise prefixes marked with community no-export to other ASes**
- **AS109 routers still need to filter the private AS**
- **Only a single /19 prefix is announced to the Internet - no routing table bloat! :-)**



Loadsharing Using Communities

4 links - Public AS

Public AS

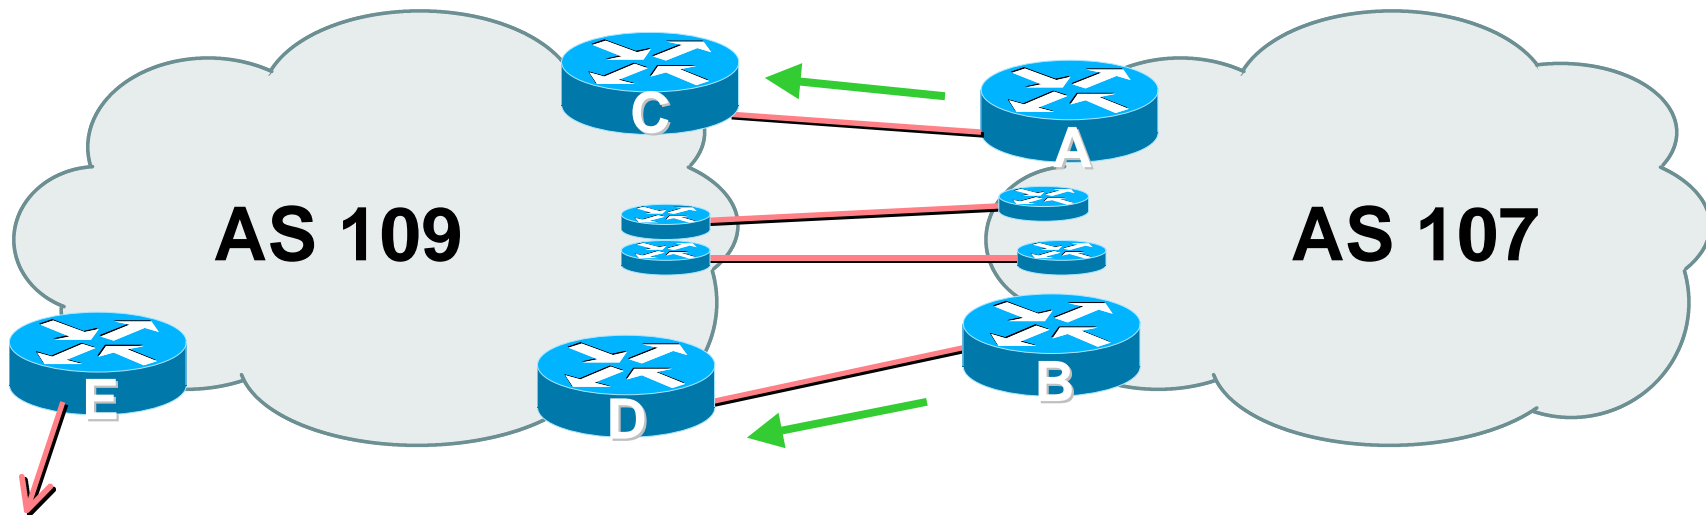

- **4 links between AS107 and AS109**

Public AS

- **Announce /19 aggregate on each link**
- **Split /19 and announce as four /21s, one on each link**

basic inbound loadsharing

assumes equal circuit capacity and even spread of traffic across address block

- **Vary the split until “perfect” loadsharing achieved**

use the no-export community for subprefixes

Public AS

- **Router A Configuration**

```
router bgp 107
```

```
network 221.10.0.0 mask 255.255.224.0
```

```
network 221.10.0.0 mask 255.255.248.0
```

```
neighbor 222.222.10.2 remote-as 109
```

```
neighbor 222.222.10.2 send-community
```

```
neighbor 222.222.10.2 prefix-list subblocks1 out
```

```
neighbor 222.222.10.2 route-map routerC-out out
```

```
neighbor 222.222.10.2 prefix-list default in
```

```
!
```

```
..next slide
```


Public AS

```
ip prefix-list subblocks1 permit 221.10.0.0/19
ip prefix-list subblocks1 permit 221.10.0.0/21
!
ip prefix-list firstblock permit 221.10.0.0/21
ip prefix-list default permit 0.0.0.0/0
!
route-map routerC-out permit 10
    match ip address prefix-list firstblock
    set community no-export
route-map routerC-out permit 20
```

Public AS

- **Router B Configuration**

```
router bgp 107
  network 221.10.0.0 mask 255.255.224.0
  network 221.10.24.0 mask 255.255.248.0
  neighbor 222.222.20.2 remote-as 109
  neighbor 222.222.20.2 send-community
  neighbor 222.222.20.2 prefix-list subblocks2 out
  neighbor 222.222.20.2 route-map routerD-out out
  neighbor 222.222.20.2 prefix-list default in
!
..next slide
```

Public AS

```
ip prefix-list subblocks2 permit 221.10.0.0/19
ip prefix-list subblocks2 permit 221.10.24.0/21
!
ip prefix-list secondblock permit 221.10.24.0/21
ip prefix-list default permit 0.0.0.0/0
!
route-map routerD-out permit 10
    match ip address prefix-list secondblock
    set community no-export
route-map routerD-out permit 20
```

Public AS

- **Router C Configuration**

```
router bgp 109
```

```
neighbor 222.222.10.1 remote-as 107
```

```
neighbor 222.222.10.1 default-originate
```

```
neighbor 222.222.10.1 prefix-list Customer in
```

```
neighbor 222.222.10.1 prefix-list default out
```

```
!
```

```
ip prefix-list Customer permit 221.10.0.0/19 le 21
```

```
ip prefix-list default permit 0.0.0.0/0
```


Loadsharing to the same ISP

- **Router D Configuration**

```
router bgp 109
  neighbor 222.222.10.5 remote-as 107
  neighbor 222.222.10.5 default-originate
  neighbor 222.222.10.5 prefix-list Customer in
  neighbor 222.222.10.5 prefix-list default out
!
ip prefix-list Customer permit 221.10.0.0/19 le 21
ip prefix-list default permit 0.0.0.0/0
```

Loadsharing to the same ISP

- **Router E Configuration**

```
router bgp 109  
    neighbor 222.222.10.17 remote-as 110  
    neighbor 222.222.10.17 filter-list 1 out  
!  
ip as-path access-list 1 permit ^107$  
ip as-path access-list 1 permit ^$
```

- **Router E only has to announce AS107 in the same way it announces other ASes**

Public AS

- **AS109 routers will not advertise prefixes marked with community no-export to other ASes**
- **AS109 ISP has no configuration work to do**

AS107 ISP can control his own loadsharing

- **Only a single /19 prefix is announced to the Internet - no routing table bloat! :-)**



Enterprise Multihoming

Enterprise Multihoming

- **Common scenario in Internet today**
- **More and more non-SPs multihoming for:**
 - service provider redundancy**
 - link redundancy**
- **Issues on Internet today:**
 - Routing Table size accelerating**
 - more and more /24 prefixes appearing in Internet Routing Table**
 - ASN consumption accelerating**

Small ISP Multihoming


- These examples also apply to ISPs who don't yet have their own address block
- ISPs **should** obtain their own address block

Get it from RIR

Makes multihoming easier

Makes changing upstreams easier

Does not cause so much fragmentation in Internet Routing Table



Enterprise Multihoming

Example One

Provider Redundancy

Enterprise Multihoming

- **Common situation is enterprise multihoming**

address space used by enterprise comes from both upstream ISPs

multihoming and loadsharing more difficult

want to avoid leaking subprefixes of upstream provider address space when possible

require provider redundancy (not just link redundancy)

Enterprise Multihoming

- **Address space from upstream should match link bandwidth to upstream, e.g.**

ISP1 ® Enterprise = 256kbps ® /22

ISP2 ® Enterprise = 128kbps ® /23

assumes address space is uniformly distributed across network

assumes that there is a requirement for 3x /23 in the Enterprise backbone

- **Next example assumes equal bandwidth links from Enterprise to ISP1 and ISP2**

Enterprise Multihoming Conditional Advertisement


- **New conditional advertisement feature in BGP**

loadsharing under normal conditions

subprefixes only announced in failure scenarios

requires upstreams to announce **only one prefix to enterprise border network**

Steady State

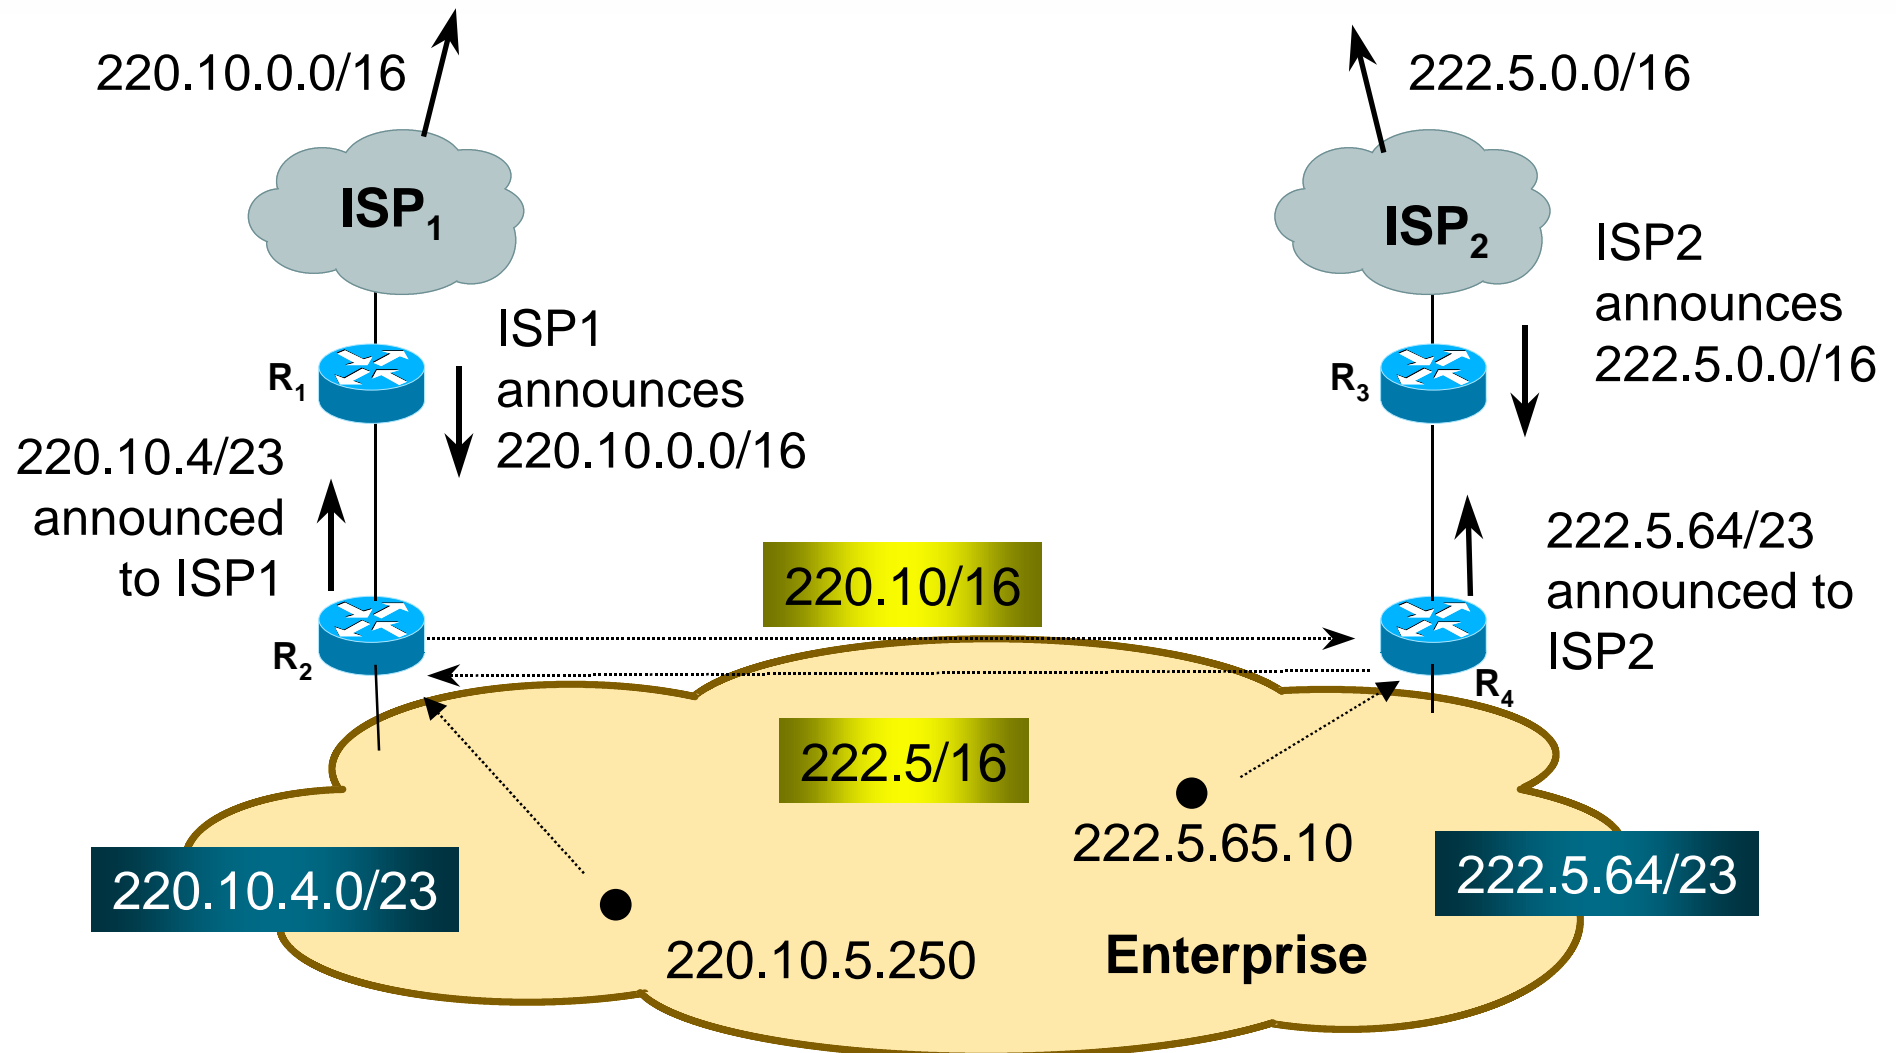

Steady State

- **ISP1 has 220.10.0.0/16 address block**
- **ISP2 has 222.5.0.0/16 address block**
- **Enterprise customer multihomes**
 - upstreams don't announce subprefixes**
 - can use private AS (ASN>64511)**
 - R2 and R4 originate default in their IGP**
 - outbound traffic uses nearest exit (IGP metrics)**

Steady State

- Router2 configuration:

```
router bgp 65534
  network 220.10.4.0 mask 255.255.254.0
  network 222.5.64.0 mask 255.255.254.0
  neighbor <R1> remote-as 150
  neighbor <R1> prefix-list isp1-in in
  neighbor <R1> prefix-list isp1-out out
  neighbor <R1> advertise-map isp2-sb non-exist-map isp2-bb
  neighbor <R4> remote-as 65534
  neighbor <R4> update-source loopback 0
!
ip route 220.10.4.0 255.255.254.0 null0 250
..next slide
```


Steady State

```
ip route 222.5.64.0 255.255.254.0 null0 250
!
ip prefix-list isp1-out permit 220.10.4.0/23
ip prefix-list isp2-out permit 222.5.64.0/23
!
ip prefix-list isp1-in permit 220.10.0.0/16
ip prefix-list isp2-in permit 222.5.0.0/16
!
route-map isp2-sb permit 10
  match ip address prefix-list isp2-out
!
route-map isp2-bb permit 10
  match ip address prefix-list isp2-in
!
```

Steady State

- **Router2 peers iBGP with Router4**
hears ISP2's /16 prefix
- **Router2 peers eBGP with Router1**
hears ISP1's /16 prefix only
announces 220.10.4.0/23 only

Link Failure

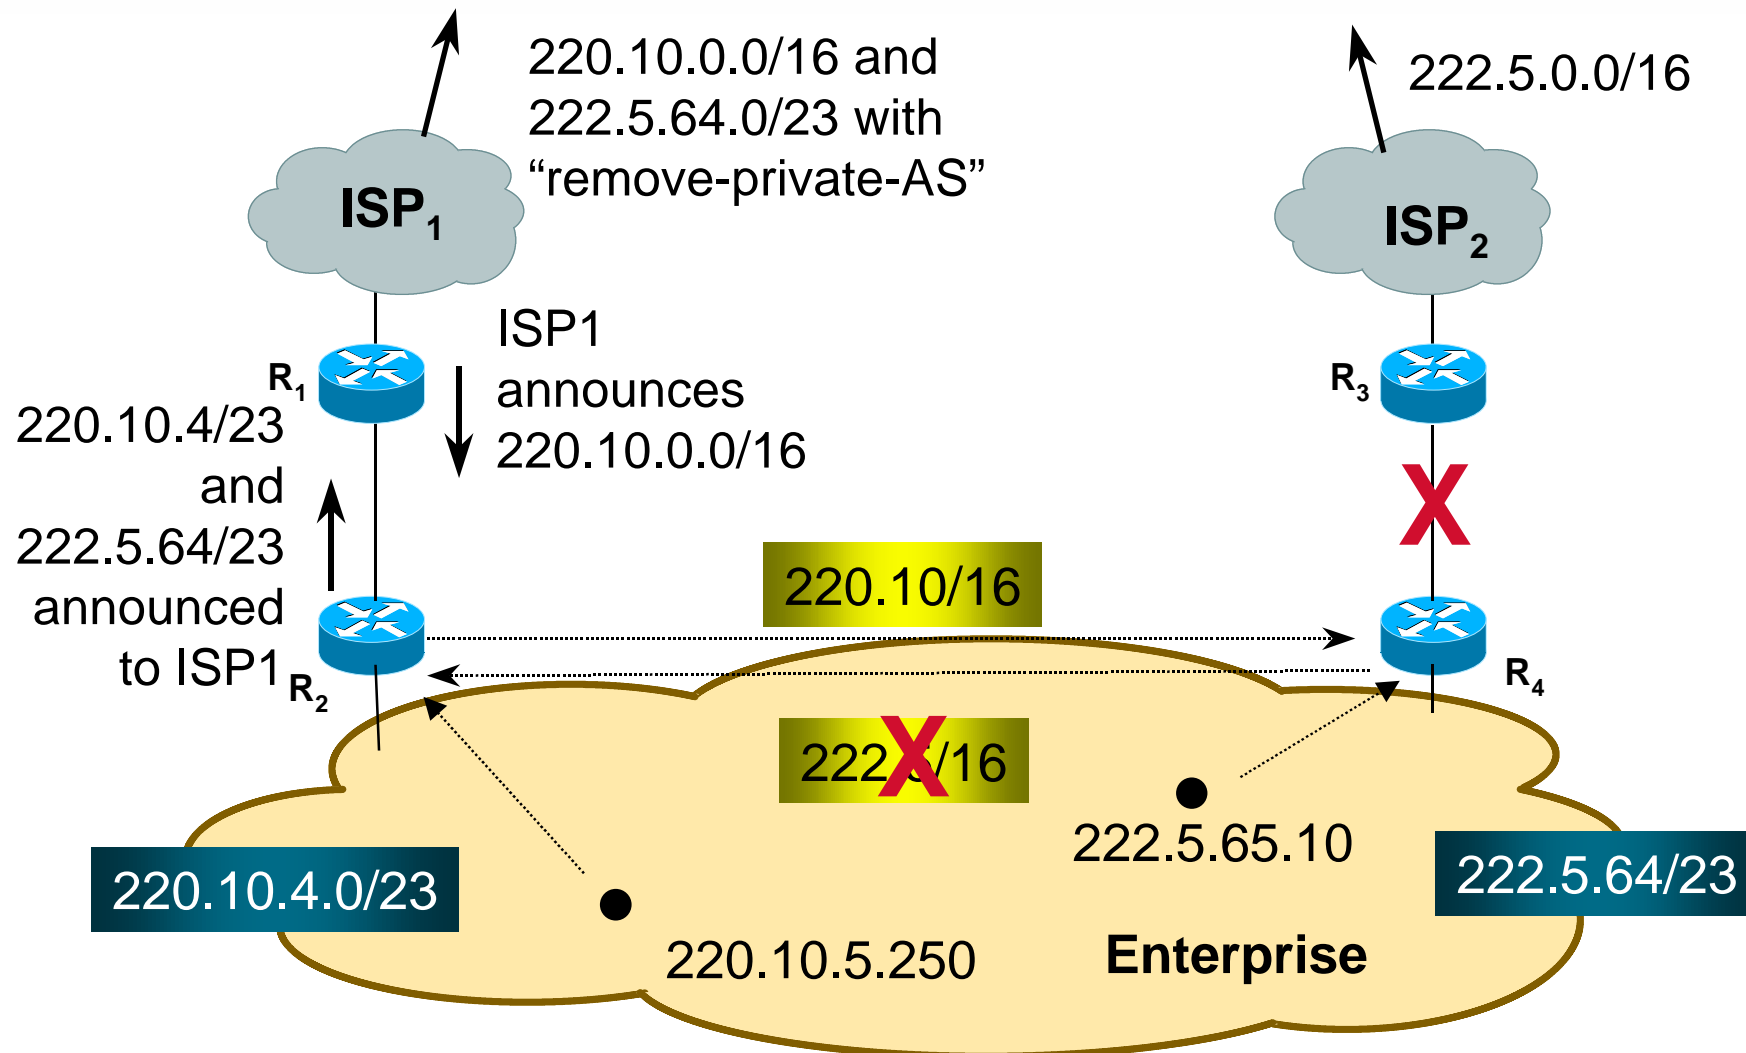


Link Failure

- **Peering between Router 4 and Router3 (ISP2) goes down**
222.5.0.0/16 prefix withdrawn
- **Conditional advertisement process activated**
Router2 starts to announce 222.5.64.0/23 to Router1
- **Connectivity for Enterprise maintained**

Enterprise Multihoming

- **Conditional advertisement useful when address space comes from both upstreams**
 - no subprefixes leaked to Internet unless in failure situation**
- **Alternative backup mechanism would be to leak /23 prefixes with longer AS path**
 - routing table bloat, reachability issues**

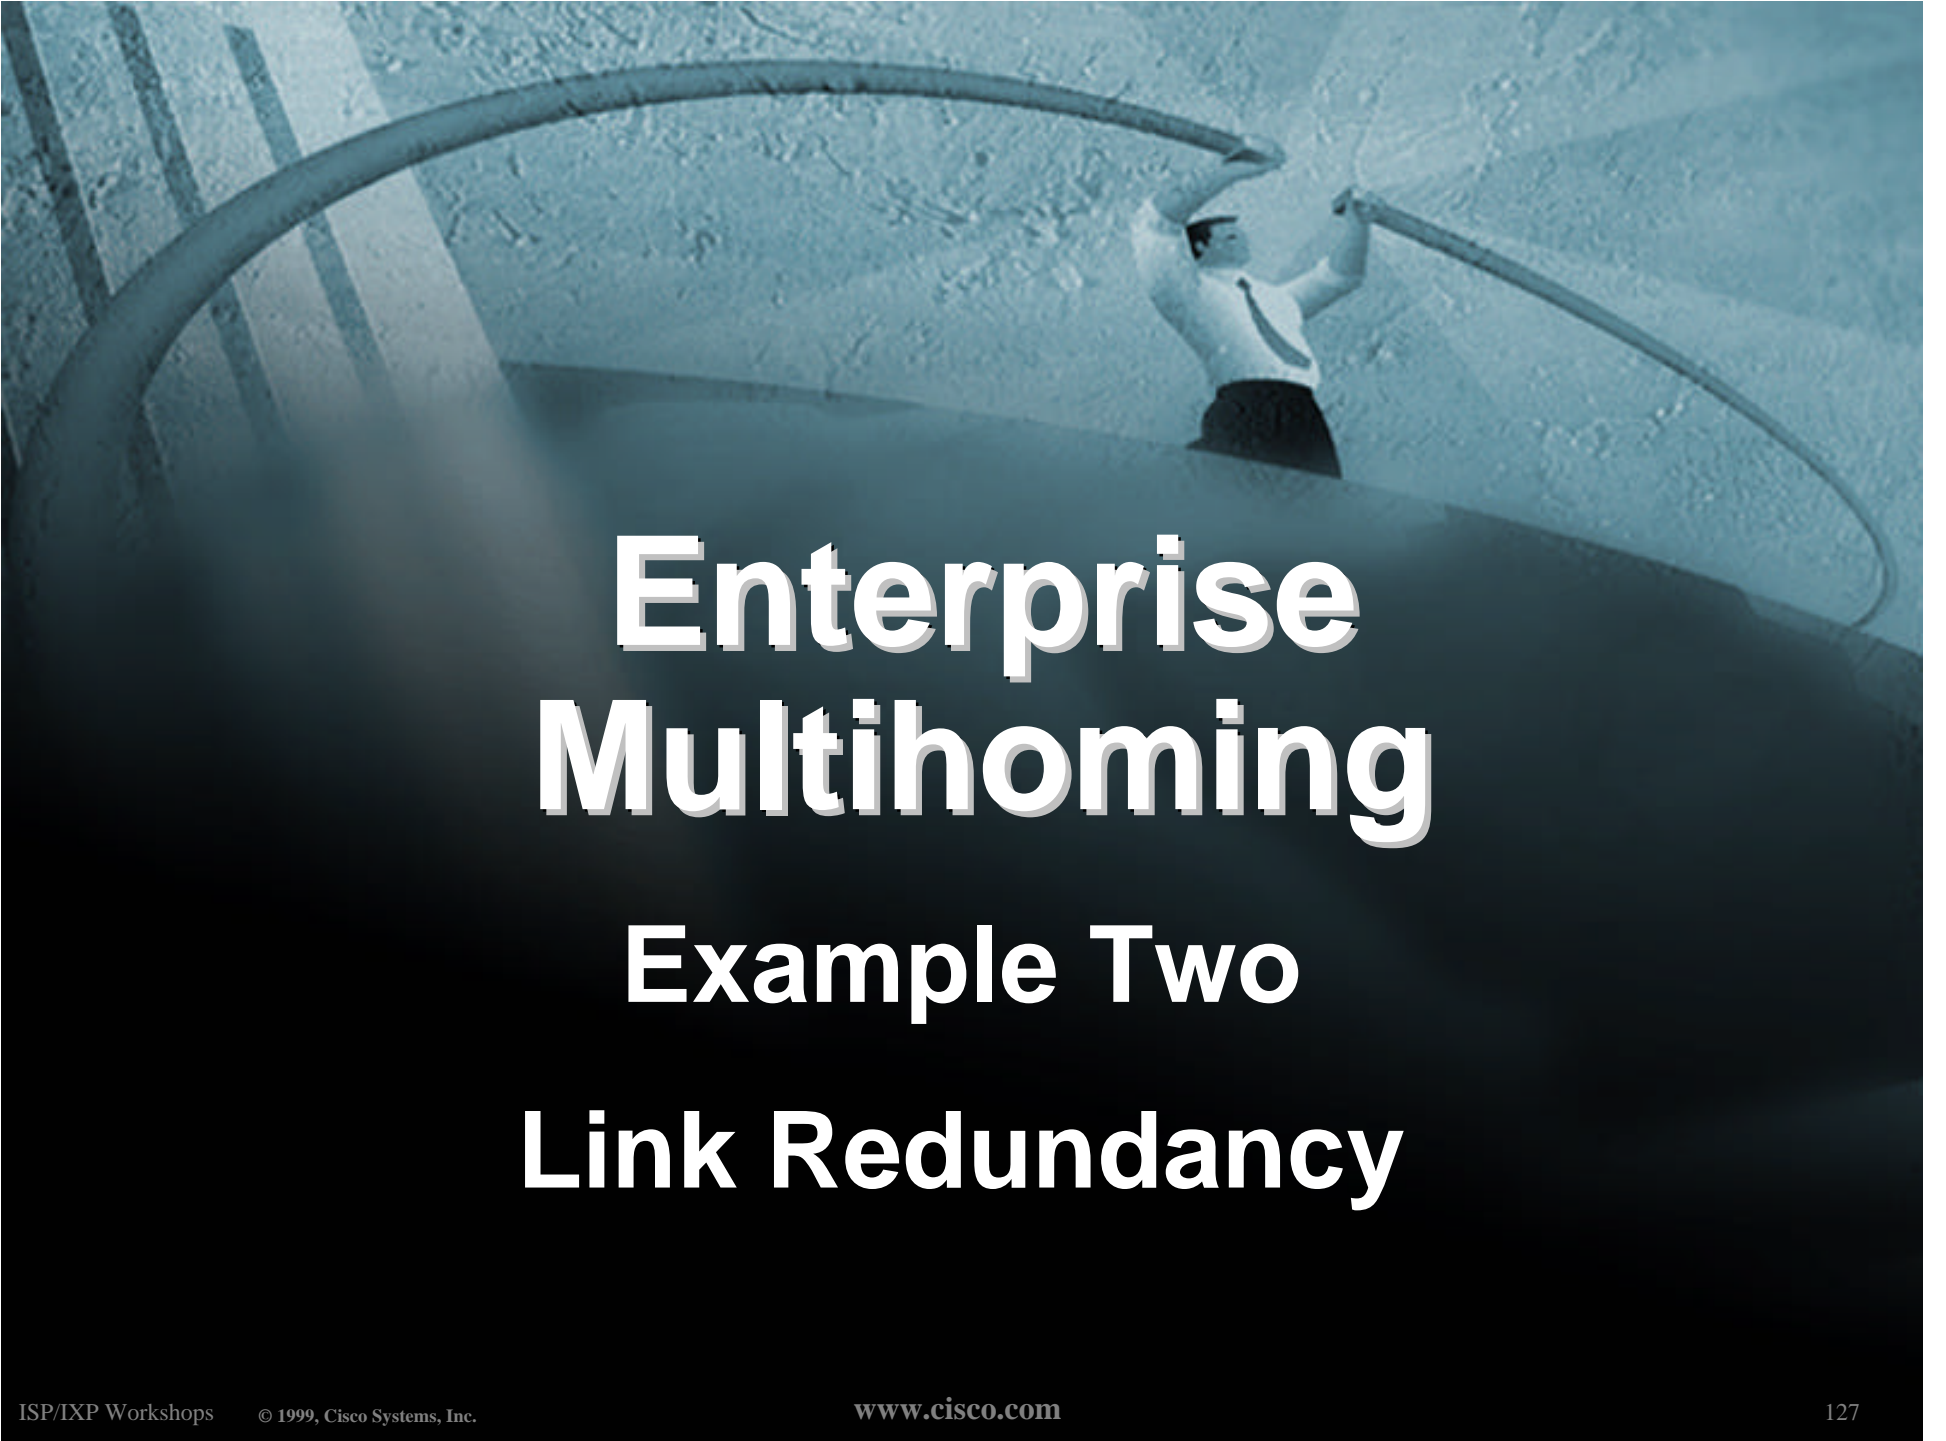

Enterprise Multihoming


Example Two

Link Redundancy

Enterprise Multihoming

- **Situation similar to previous example**
 - address space used by enterprise comes from **both** upstream ISPs**
 - use conditional advertisement**
 - want to avoid leaking subprefixes of upstream provider address space into the Internet**


Steady State

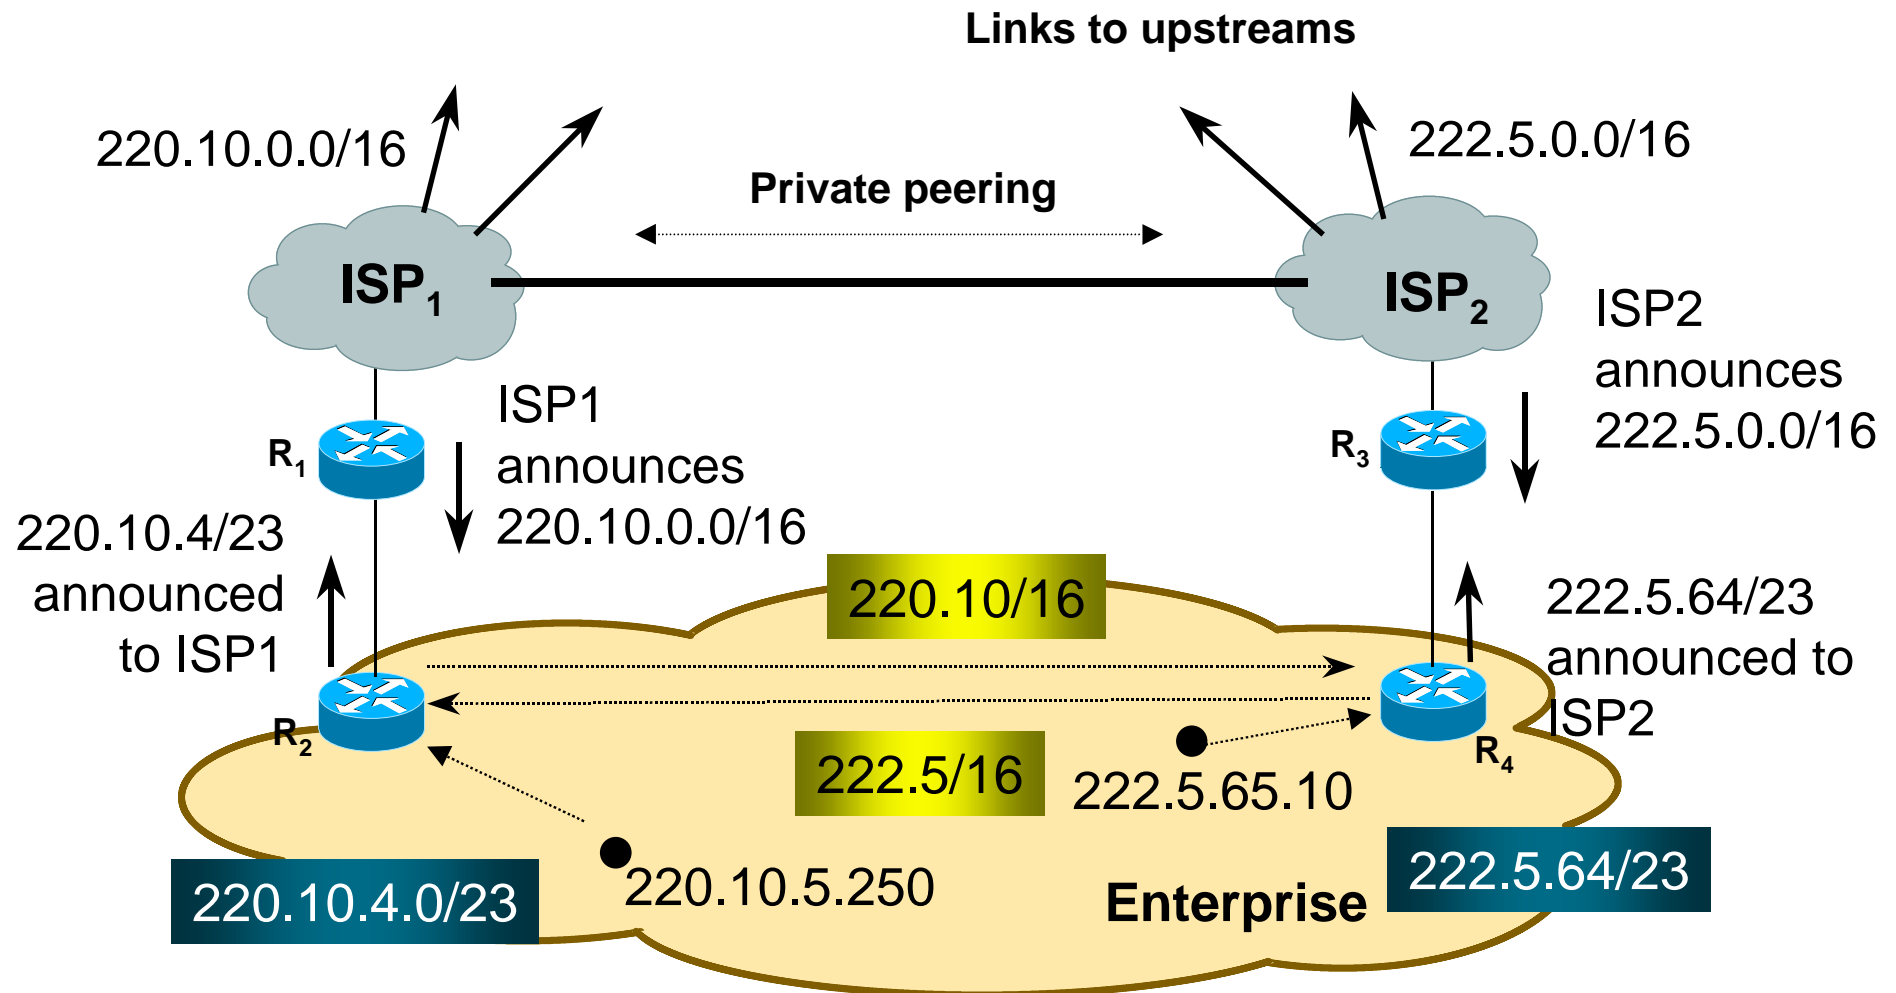


Steady State

- **ISP1 and ISP2 have private peering exchange each other's prefixes**
enterprise customer is looking for link redundancy only
no subprefixes leaked to Internet
- **Configuration of R2 as in previous example**

Traffic Flow Steady State

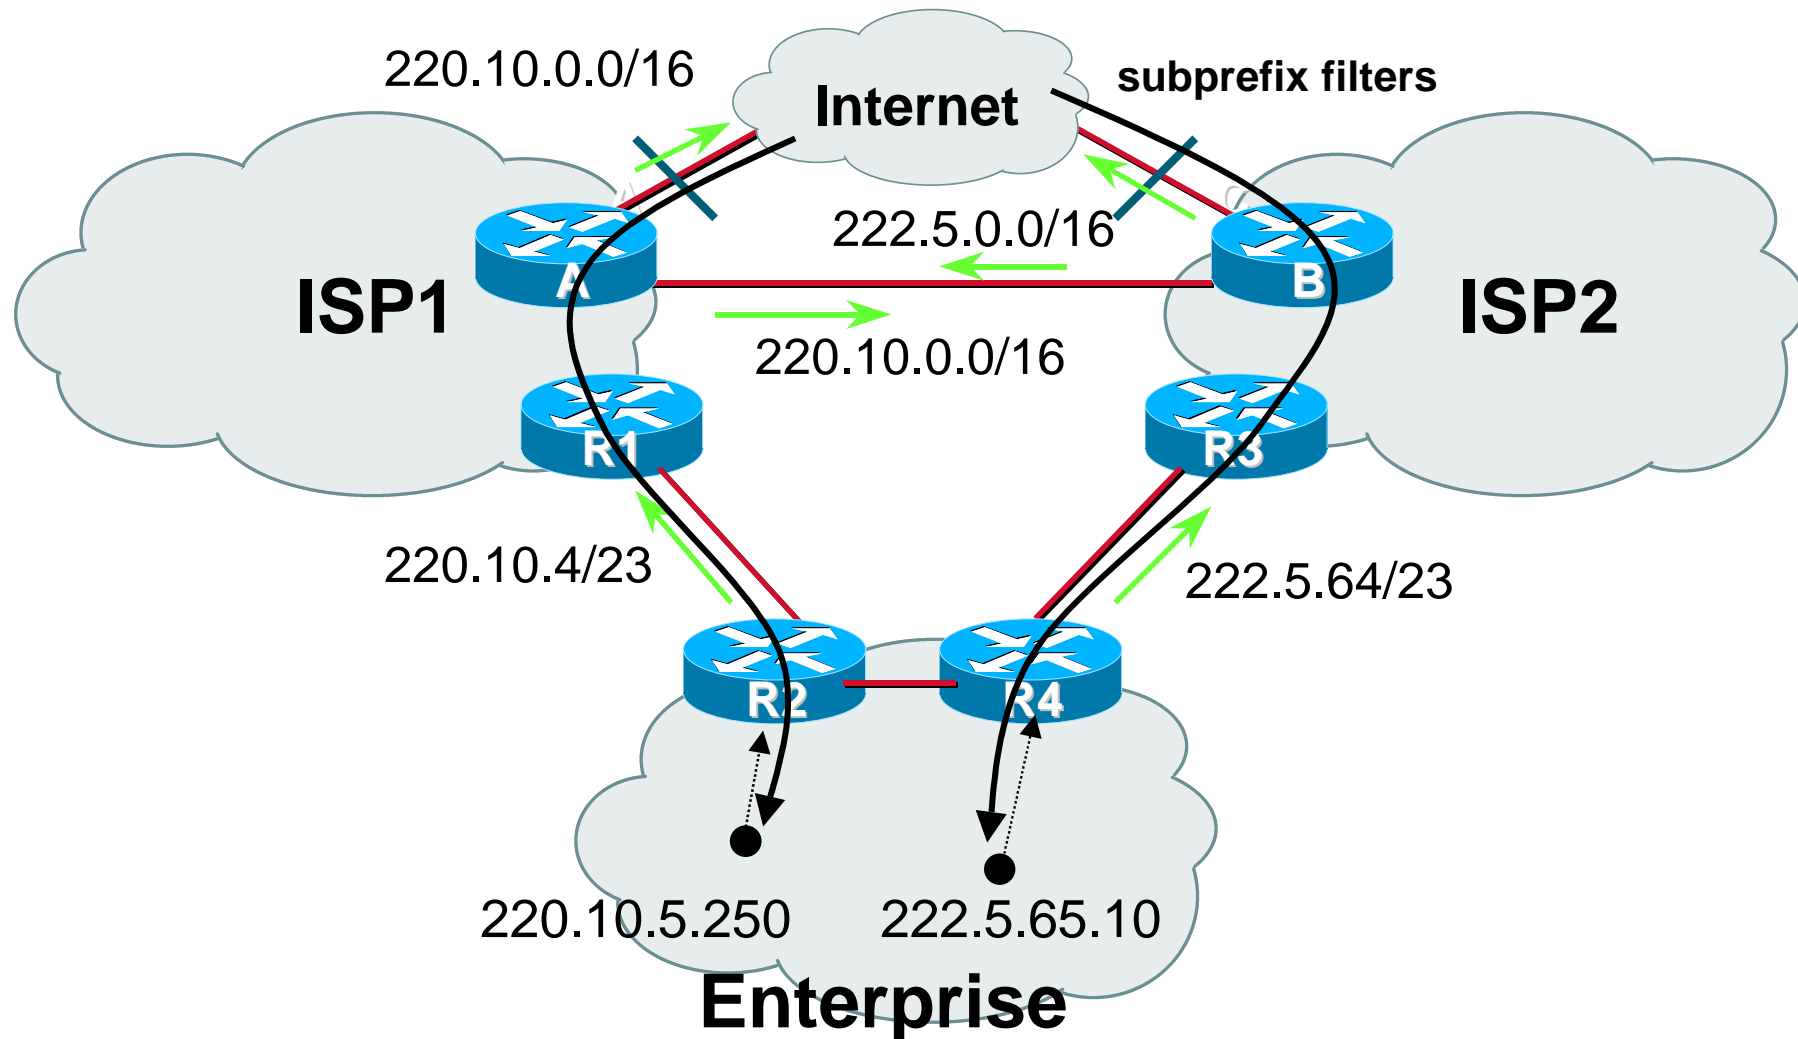


Link Failure

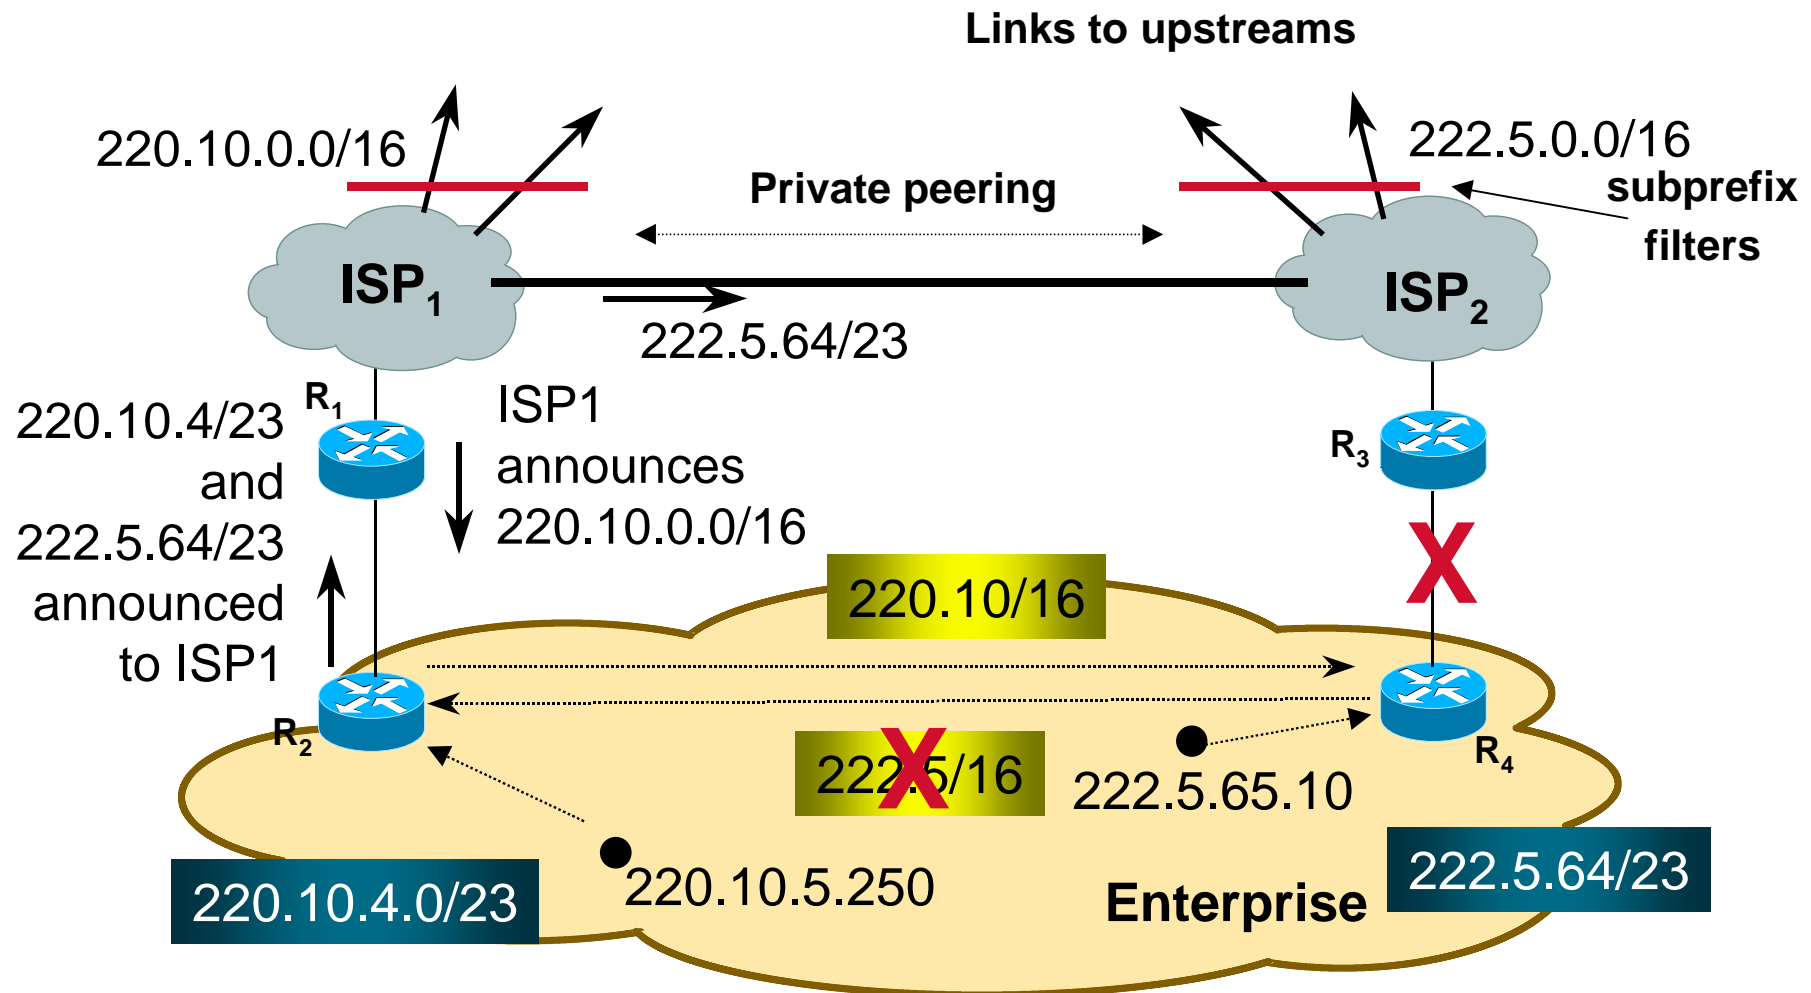

Link Failure

- **R3 ® R4 link goes down**
conditional advertisement effective
222.5.64/23 announced by R2 to R1
222.5.64/23 announced by ISP1 to ISP2
- **Filters!**
ISP1 and ISP2 filter subprefixes from their
blocks outbound to Internet
backup yet no subprefixes leaked to Internet

Link Failure

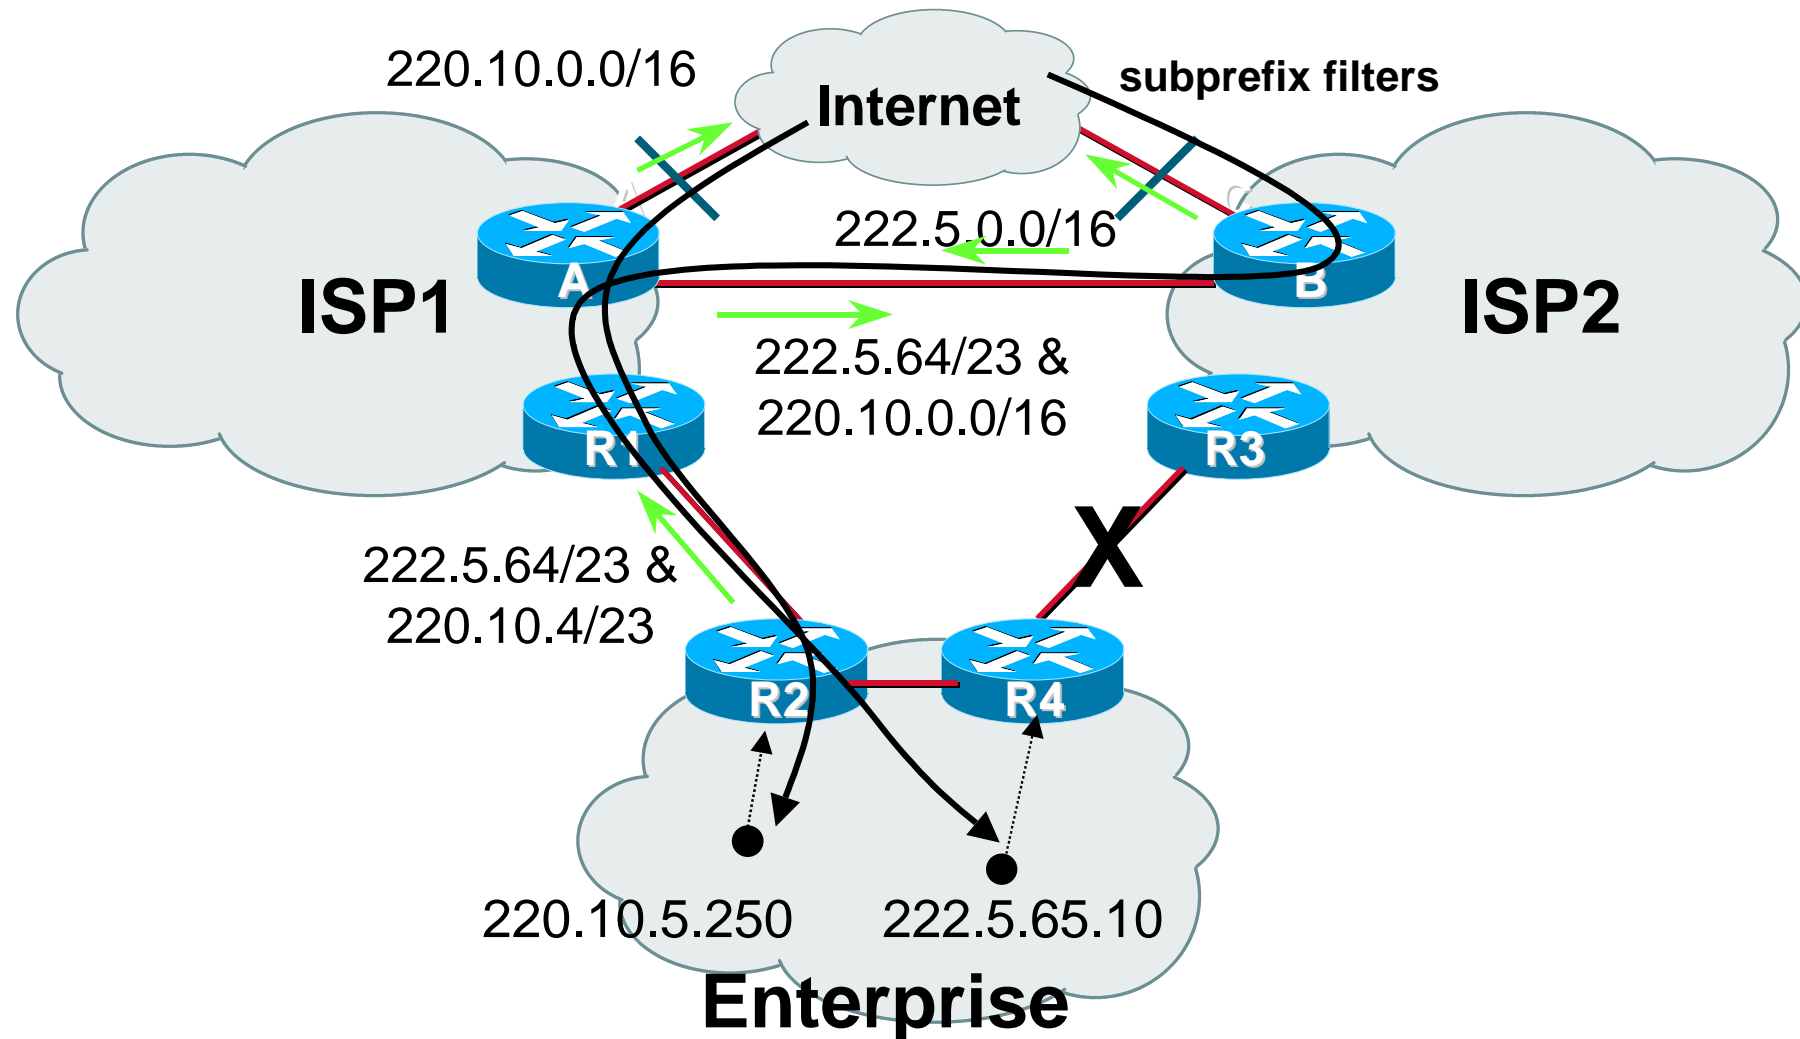

Configuration

- **RouterA ISP1 border router configuration:**

```
router bgp 150
  network 220.10.0.0 mask 255.255.0.0
  neighbor <routerB> remote-as 108
  neighbor <routerB> prefix-list isp2-in in
  neighbor <routerB> prefix-list isp2-out out
  neighbor <upstream> remote-as 110
  neighbor <upstream> prefix-list rfc1918-dsua in
  neighbor <upstream> prefix-list myblock out
!
ip route 220.10.0.0 255.255.0.0 null0
..next slide
```

Configuration

```
ip prefix-list isp2-out permit 220.10.0.0/16
ip prefix-list isp2-out permit 222.5.64.0/23
!
ip prefix-list isp2-in permit 222.5.0.0/16
ip prefix-list isp2-in permit 220.10.4.0/23
!
ip prefix-list myblock permit 220.10.0.0/16
!
```

- The “myblock” prefix list ensures that no subprefixes are leaked to the Internet routing table

Recommendations

- Address space for Enterprise network should be obtained from **both** upstreams according to link bandwidths
- Address space should be distributed according to utilisation
loadsharing is about address assignment policies, monitoring bandwidth utilisation, as well as BGP attribute manipulation
- Use a private AS - no need for a public AS
needs agreement between two upstreams

CISCO SYSTEMS



EMPOWERING THE
INTERNET GENERATIONSM